



AVENTOS

Various applications for lift systems

AVENTOS – Moving solutions for every lift system



Use AVENTOS to address individual customer requests



AVENTOS is the lift system programme that provides perfect motion in the wall cabinet area: Even wide lift systems will open easily and close silently and effortlessly thanks to BLUMOTION. The variable stop ensures that AVENTOS lift systems always remain in the desired position. Your customers will be amazed at how easy it is to use.

These excellent solutions for Bi-Fold, up & over, lift up & stay lift applications can accommodate many new design options. We have further enhanced this range with a new product specifically for small stay-lifts. With these products you can fulfil all your customers' desires by offering the correct solution for any wall cabinet.

Content

4	The lift system programme	18	AVENTOS HF
8	Inspirational action	30	AVENTOS HS
10	Inspiring quality	38	AVENTOS HL
12	Easy assembly and adjustment	44	AVENTOS HK
14	Programme with many options	50	AVENTOS HK-S
16	Harmonious design	56	Perfecting motion

The lift system programme




AVENTOS HF for bi-fold lift systems

- Ideal for higher wall cabinets because the handle remains easy to reach in any position.
- Due to the two-part front, the space requirement at the top is low for very high cabinet heights.
- AVENTOS HF can also be used with fronts of different heights.



AVENTOS HS for up & over lift systems

- Ideal for large-area, single fronts.
- Space requirement above the cabinet is minimised due to highly engineered movement.
- You can also use cornice or crown moulding with AVENTOS HS.

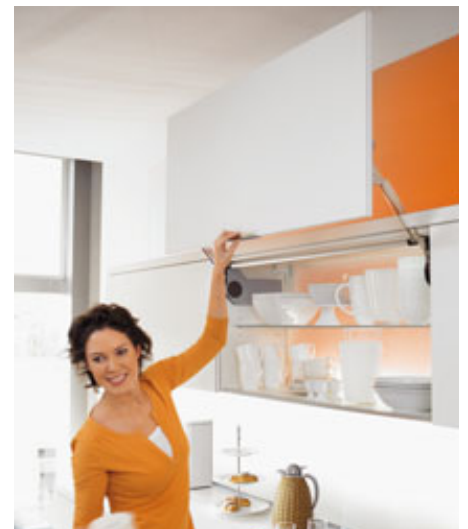

AVENTOS HL for lift ups

- Ideal for applications in high or wall cabinets with fronts above as well as recessed cabinets.
- Well-suited for small-area, single fronts.
- AVENTOS HL can be used in isolation with low wall cabinets.

Versatile application

There are many good reasons why AVENTOS lift systems are a good choice for the wall cabinet.

Because lift systems open upwards, they provide an excellent view into the cabinet interior. This enables comfortable and ergonomic access to the items stored. The furniture user retains freedom of motion, unhindered by the lift mechanism.

Additionally, lift systems can offer a huge variety of design options for wide fronts. The visual effect achieved on the base units can often be replicated on the wall cabinets.



AVENTOS HK for stay lifts

- Ideal solution for low cabinet heights in the wall cabinet.
- AVENTOS HK requires only a small amount of space at the top due to the pivot action.
- No hinges are required.



AVENTOS HK-S for small stay lifts


- Ideal solution for small cabinets, e.g. over the larder unit or refrigerator.
- AVENTOS HK-S requires only a small amount of space at the top due to the pivot action.
- No hinges are required.

The lift system programme

Choosing the right lift system

The following graphic shows where the four AVENTOS programme types can be used in a common kitchen system.

AVENTOS HK-S AVENTOS HL AVENTOS HF AVENTOS HS AVENTOS HS AVENTOS HF AVENTOS HS AVENTOS HS AVENTOS HK AVENTOS
AVENTOS HL AVENTOS HL AVENTOS HL AVENTOS HK

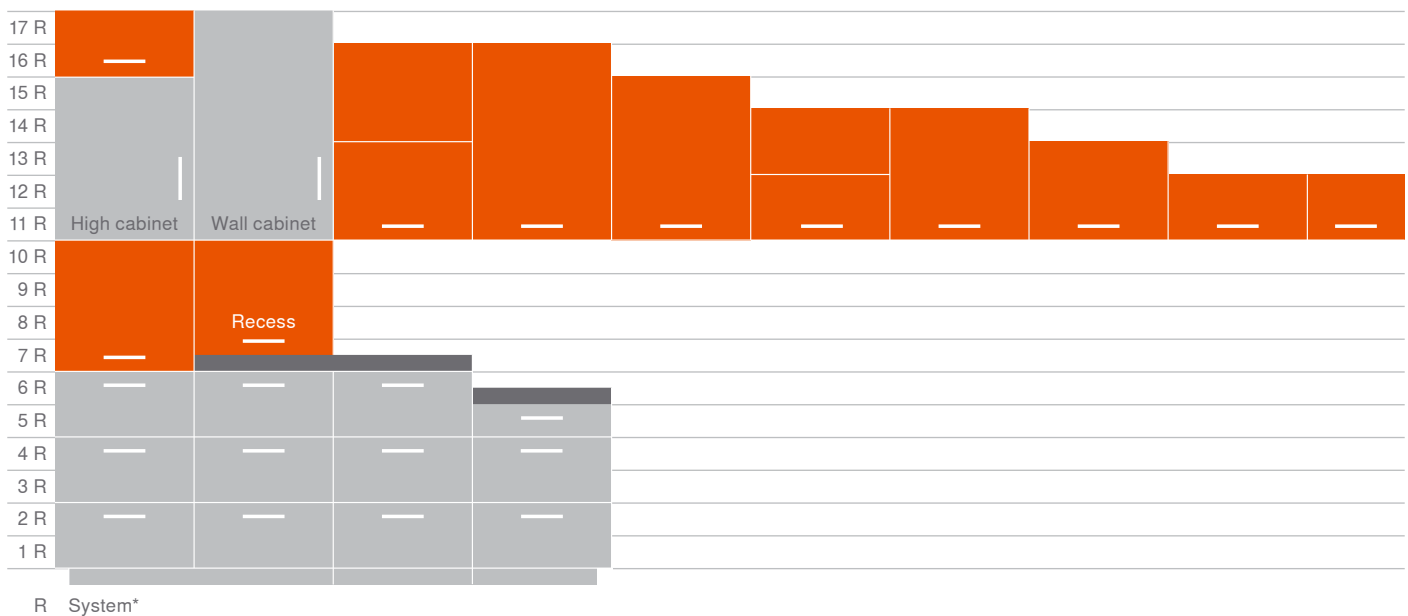

* AVENTOS can also be used in common 4 systems in the wall cabinet area.



AVENTOS

at a glance

	HF	HS	HL	HK	HK-S
Area of application					
Higher wall cabinets	X	X			
Medium wall cabinets	X	X	X	X	
Low wall cabinets			X	X	X
High cabinets			X	X	X
Room planning					
Min. top space requirement	X	X		X	X
Design					
Single front		X	X	X	X
Two-part front	X				
Can be combined with cornice or crown moulding		X	X	X	X
Cabinet height dimensions in mm	480–1.040	350–800	300–580	up to 600*	max. 400
Cabinet width dimensions in mm	up to 1.800	up to 1.800	up to 1.800	up to 1.800	**
Ergonomics					
Handles within easy reach	X	X	X	X	X
Good access to cabinet interior	X	X	X	X	X

* For ergonomic reasons, we recommend a maximum cabinet height of 600 mm. However, higher lift systems can also be used subject to the power factor limits (see page 41).

** Depending on the power factor

DYNAMIC SPACE is a marketing tool from Blum that helps to make good arguments for adding high-quality equipment to a kitchen: Better ergonomics, more comfort and more fun in the kitchen.

www.dynamicspace.com



Motion that inspires



BLUMOTION

inside



Four ways of experiencing Perfect Motion


Surprise and fascinate your customers:

Frontals open effortlessly with all AVENTOS options. Even heavy fronts only require light operating forces. The variable stop means that fronts always remain in the desired position. This ensures that the handle is always within easy reach.


AVENTOS also offers a high degree of elegance and comfort when closing. The intelligent technology of the BLUMOTION adaptive system ensures that fronts always close silently and effortlessly – regardless of the size, weight and closing speed.

Quality


AVENTOS HF

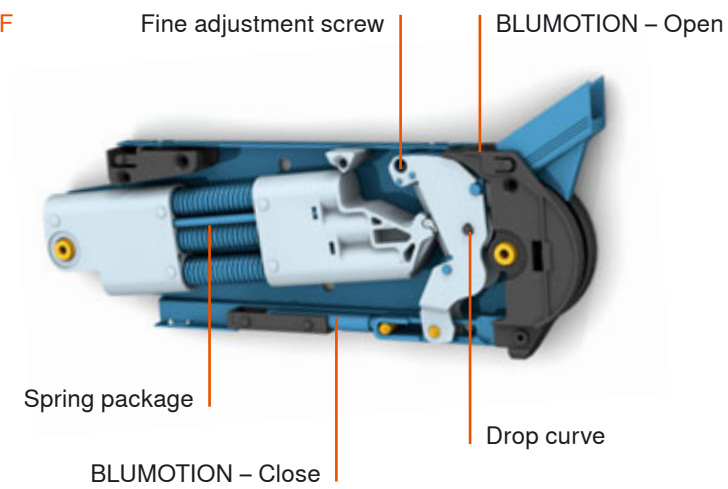

AVENTOS HS

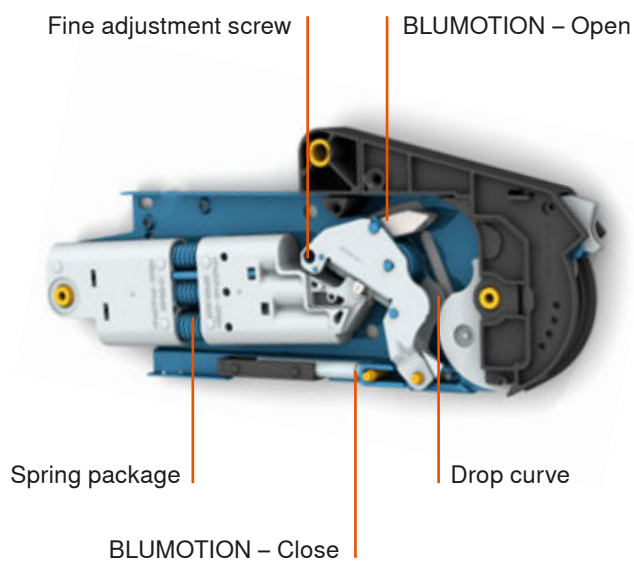

AVENTOS HL

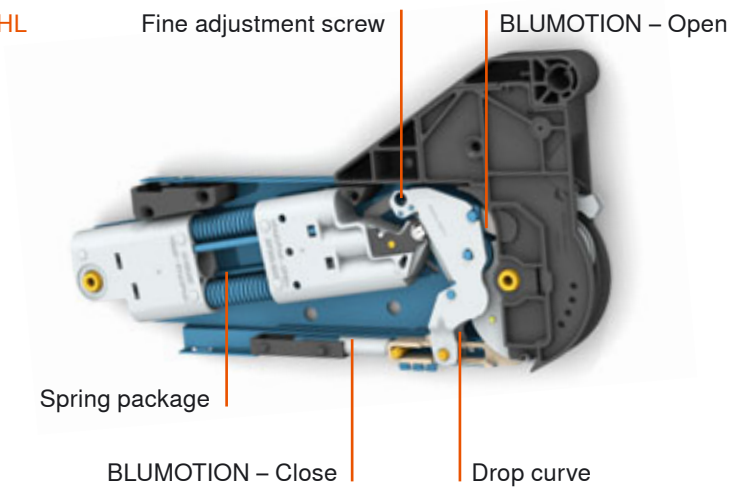


Quality –

for the lifetime of the furniture


AVENTOS lift systems will bring your customers years of happiness.

The core of these fitting solutions is the lift mechanism with BLUMOTION and a robust spring package. This ensures high durability and ease of use when opening and closing.

AVENTOS HK

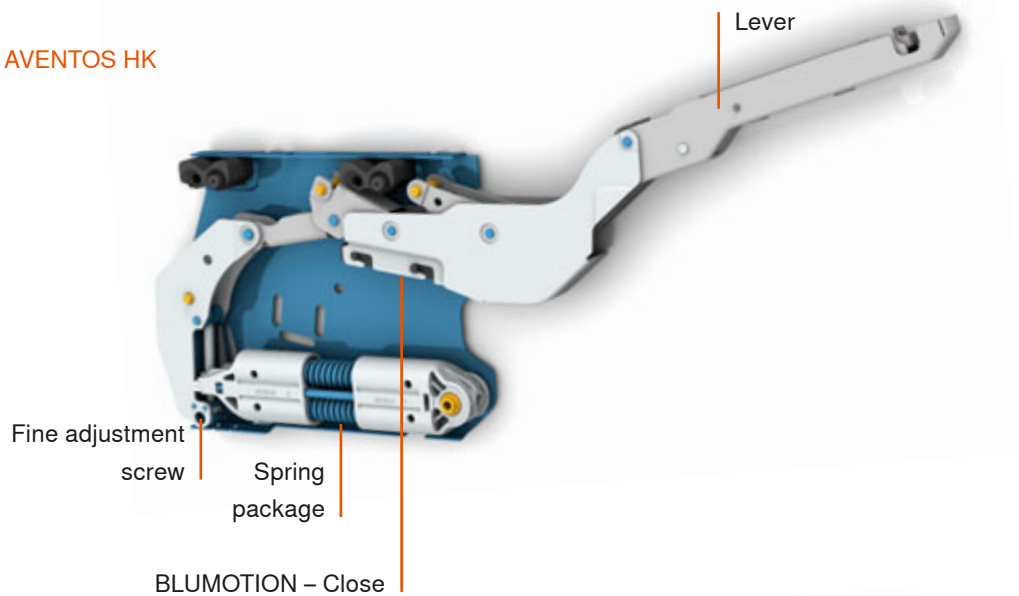

AVENTOS HK-S

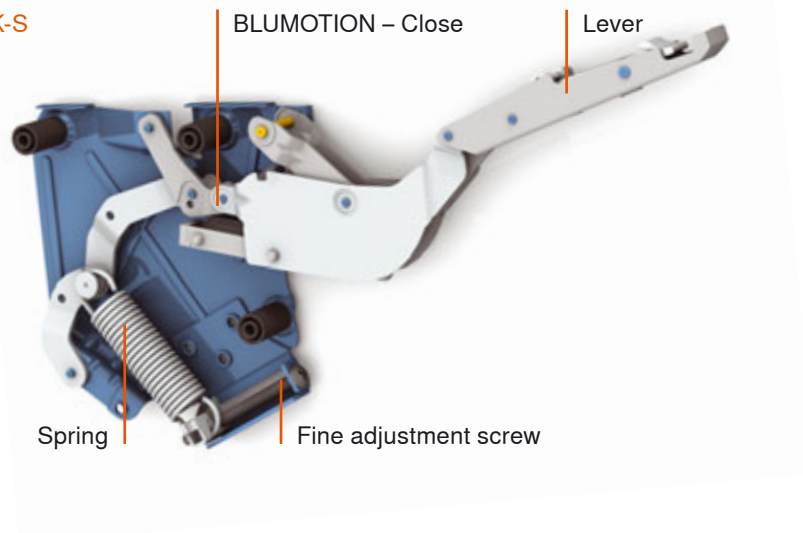

Assembly





Perfect assembly and accurate adjustment **made easy**

Assembly and adjustment need to be precise if you are to guarantee that your customers receive the full “AVENTOS experience”.

The lift force can be adjusted (according to the frontal weight) using a power screw driver (Pozidriv®, size 2, length 39 mm). To make adjustment easier all AVENTOS mechanisms include a calibrated scale.

AVENTOS components are light, regardless of the frontal size, and can be assembled quickly and easily. Thanks to proven CLIP technology, assembly is almost entirely tool-free. Fronts can be adjusted in 3 dimensions to ensure the correct gap alignment.



Programme




Every conceivable application within a concise programme

The AVENTOS programme comprises of a minimum number of symmetrical parts that can be used in multiple applications.

With a straightforward programme of lift mechanisms and lever arms, practically all front sizes and door weights are covered. The programme encompasses cabinet widths up to 1800 mm as well as every conceivable cabinet height.

AVENTOS opens up numerous design options:

All programmes can be combined with composite frontals (wood, MFC, MDF, etc) as well as narrow and wide aluminium frames.

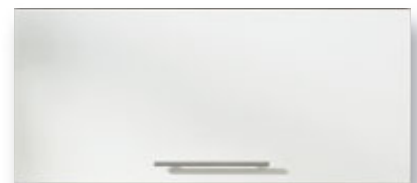






Harmonious design and high functionality

Technology that inspires.

Along with high functionality, the AVENTOS programme also inspires through its simple yet elegant design. This was also the opinion of the expert jury at the 2007 Interzum Awards. As winner of the "best of the best" category. This award was won by AVENTOS on the combined strengths of; unsurpassed function and sleek design. The lift system won the "red dot award for product design" in 2008 and was nominated for the "Design Prize from the Federal Republic of Germany" in 2009.



AVENTOS HF

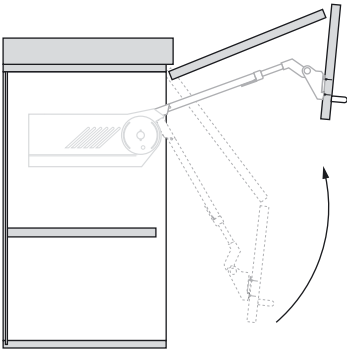


The bi-fold lift system can be used in the kitchen and living area.

Whether wooden fronts, narrow or wide alu frames or a combination of different materials: AVENTOS HF creates numerous design options. It can also be used with fronts of different heights.



Other persuasive advantages

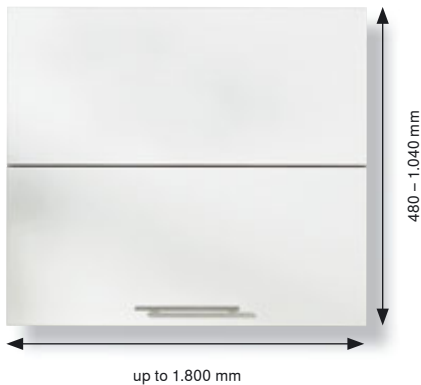


Small programme – wide range of solutions

AVENTOS HF completely covers all common lift system widths and heights with just one small programme. The product line comprises 3 lift mechanisms and 4 telescopic arms. What's more; all main components are symmetrical.

The narrow programme range simplifies ordering, commissioning and warehousing.

AVENTOS HF is suitable for cabinet widths up to 1.800 mm and for cabinet heights from 480 to 1.040 mm.

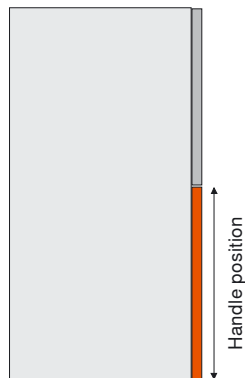


Free positioning of handles

Every type of handle can be used alongside AVENTOS HF. Ideally the handle should be located near the bottom edge of the lower frontal to ensure that it is always within easy reach. AVENTOS HF can also be used with handle-less frontals (where the lower frontal slightly overhangs the underside of the cabinet).



Includes a finger safety feature

The CLIP top centre hinge is characterized by an innovative "release" feature that ensures finger safety.

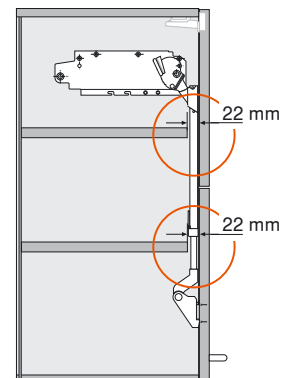

Similar shelves possible

Optimal use of storage space: Lift mechanisms are attached so that depending on the height of the cabinet up to two identical shelves can be used (with a space allowance/cut back of only 22 mm).



No protruding parts

As the telescopic arm can be removed, there are no protruding parts to obstruct internal transport during furniture manufacturing. This is also an advantage during kitchen assembly.

AVENTOS HF

Assembly in just a few steps

Nearly all steps are tool-free thanks to CLIP assembly. We recommend removing the front for safe and easy cabinet assembly onsite. This is also made very easy with CLIP technology.




1. The telescopic arms are attached to the lift mechanism using CLIP technology.



2. The upper front is placed on the telescopic arm and CLIP top hinges are attached.



3. CLIP top centre hinges are used to connect both fronts.

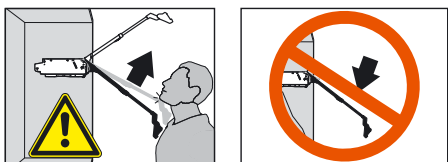

Warning

There is a danger of injury if the telescopic arm springs upward. Remove the telescopic arm rather than pushing it down.

Special warning and safety information must be sent out when used in North America.



4. The telescopic arm and lower front are connected to each other via the CLIP mechanism.

Quick adjustment, precise adjustment

Both bi-fold lift system fronts can be adjusted in all 3 dimensions for a precise gap design.

The fine adjustment for the opening and closing forces for AVENTOS HF is carried out using a power screwdriver. The force can be adjusted precisely to the corresponding door weight. It's child's play thanks to the integrated calibrated scale.

Perfect motion requires precise adjustment:



1. Simple and infinitely variable: A power screwdriver is used to properly set the lift mechanism (Pozidriv®, size 2, length 39 mm).

If the front falls when let go, it must be turned clockwise.

If the front rises when let go, it must be turned anti-clockwise.




2. The telescopic arms adjust themselves by closing the front. They are fastened using the centre lever. This process also adjusts the tensions in the front.



3. You can set the desired gap between the fronts using the CLIP top centre hinge.

Ordering information Wooden fronts and wide alu frames

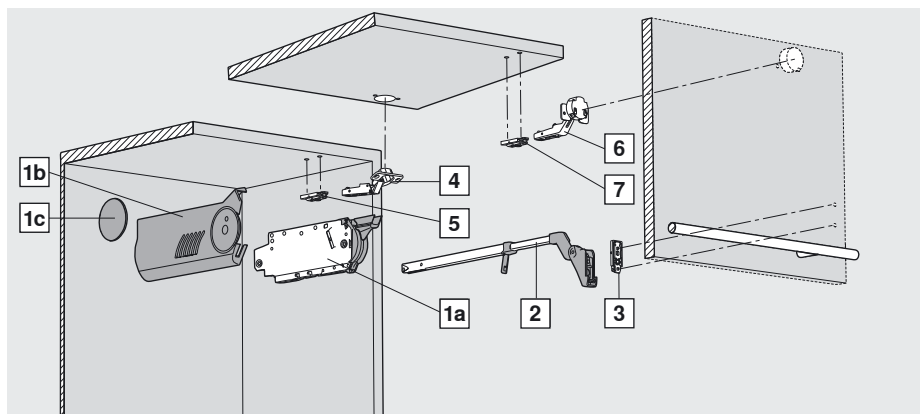

3 types of lift mechanisms are enough to cover a wide range of applications.


By establishing the power factor you can calculate the type and quantity of lift mechanisms.

The power factor required depends on the weight of the lower and upper front (incl. handle) and cabinet height.

The power factor and the door weight can be increased by 50% when a third lift mechanism is used.

i

This is how it's done: Power factor LF = cabinet height [mm] x door weight including handle [kg]

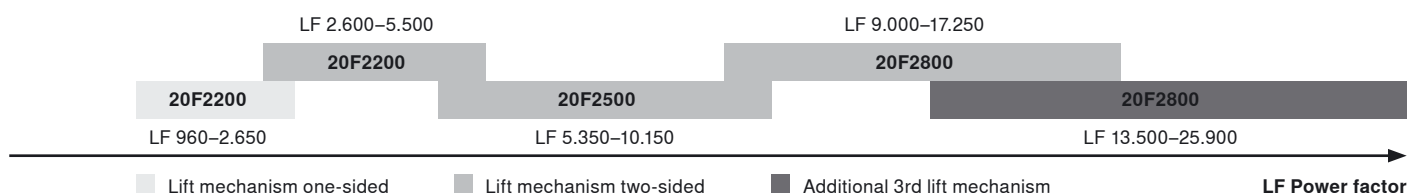

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1	Lift mechanism set	
	Power factor LF	
	2.600–5.500	20F2200
	5.350–10.150	20F2500
	9.000–17.250	20F2800
	Composed of:	
1a	2 x symmetrical lift mechanisms	
1b	2 x cover plates left/right	
1c	2 x round cover caps	
	10 x chipboard screws, Ø 4 x 35 mm	

2	Telescopic arm set	
	Nickel plated steel	
	Cabinet height 480–570 mm	20F3200
	Cabinet height 560–710 mm	20F3500
	Cabinet height 700–900 mm	20F3800
	Cabinet height 760–1.040 mm	20F3900
	Composed of:	
	2 x symmetrical telescopic arms	

3	Mounting plate for telescopic arm	
	All horizontal mounting plates with 0 mm distance	
	Recommendation	
	Screw-on* Spacing 0 mm	175H5400
	Knock-in Spacing 0 mm	177H5100
	* Use self tapping screws for wide alu frames 608.085	

4	CLIP top 120° hinge		
	Boss: Steel boss	Screw-on* Unsprung	70T5550.TL
	Boss: Steel boss	INSERTA Unsprung	70T5590BTL

* Use self tapping screws for wide alu frames 608.085

5	Mounting plate for CLIP top 120° hinge		
	Standard mounting plates, distance depends on the gap top		
	Recommendation		
	Screw-on	Spacing 0 mm	175H5400

6	CLIP top centre hinge		
	Boss: Zinc boss	Screw-on* Unsprung	78Z5500T
	Boss: Zinc boss	EXPANDO Unsprung	78Z553ET

* Use self tapping screws for wide alu frames 608.085


7	Mounting plate for CLIP top centre hinge		
	Standard mounting plates with 0 mm distance		
	Recommendation		
	Screw-on* Spacing 0 mm		175H5400
	Only use a cruciform adapter plate for wide alu frames under a 55 mm frame width		

* Use self tapping screws for wide alu frames 608.085

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2




Peg positions for lift mechanism

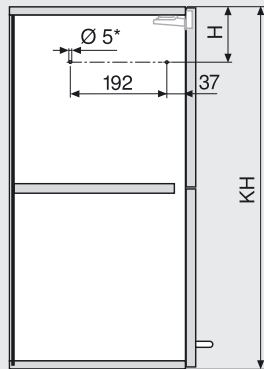

* Drilling depth 5 mm


Cabinet height KH	H
480–549 mm	KH x 0.3 - 28 mm
550–1.040 mm	KH x 0.3 - 57 mm

Fixing positions for lift mechanism

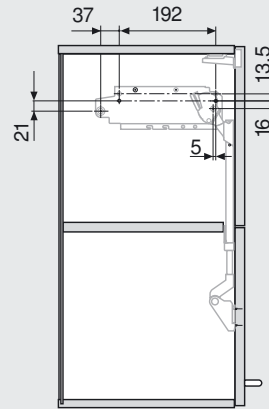


4 x Ø 4 x 35 mm

Space requirement

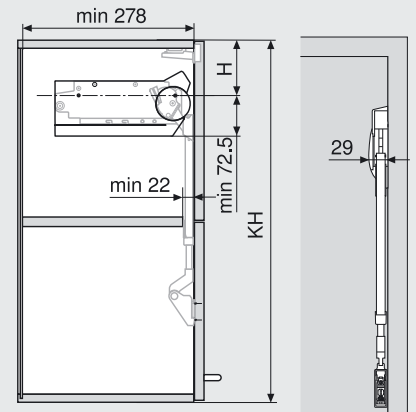

KH Cabinet height

Front assembly

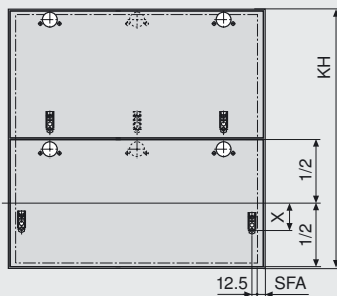


SFA Side front overlay

3 hinges starting at cabinet width 1.200 mm and/or 12 kg door weight
4 hinges starting at cabinet width 1.800 mm and/or 20 kg door weight

Cabinet height KH	X Screw-on/ EXPANDO	X Knock-in
480–549 mm	68 mm	70 mm
550–1.040 mm	45 mm	47 mm

CLIP top 120° hinge unsprung

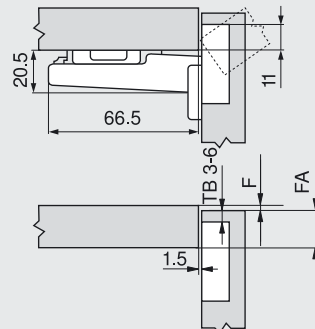


F Gap

Drilling distance TB

	Front overlay FA															
	5	6	7	8	9	10	11	12	13	14	15	16	17			
0											3	4	5	6		
3								3	4	5	6					
6				3	4	5	6									
9	3	4	5	6												

Mounting plate

CLIP top centre hinge

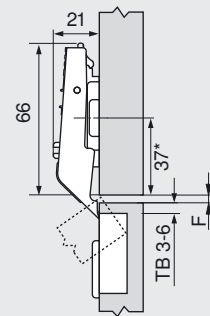

* 37 mm for cruciform mounting plates (37/32)


Minimum gap F = 1.5 mm

Drilling distance TB


	Centre gap F															
												3	4	5	6	
0												6	5	4	3	
3																
6																
9																

Mounting plate


Screw-on

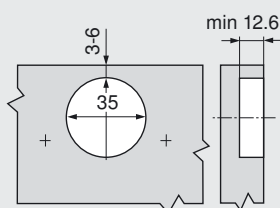

INSERTA/knock-in/EXPANDO assembly

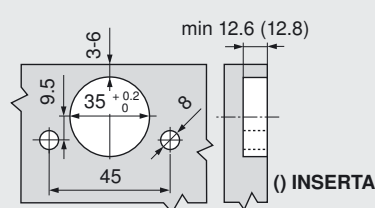


Space requirement

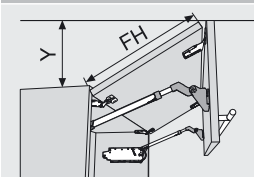

OEB =
Opening angle
stop

Without OEB		Y = FH x 0.44 + 38
OEB 104°	20F7051	Y = FH x 0.24 + 34
OEB 83°	20F7011	Y = 0

Ordering information Narrow alu frames

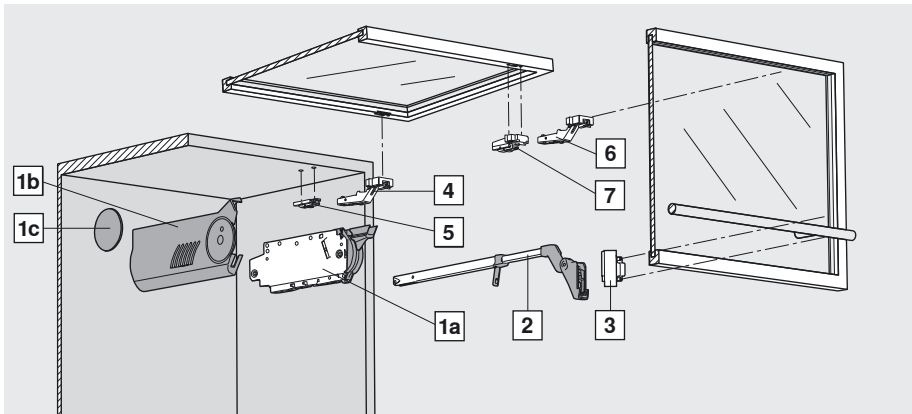


3 types of lift mechanisms are enough to cover a wide range of applications.

By establishing the power factor you can calculate the type and quantity of lift mechanisms. The power factor required depends on the weight of the lower and upper front (incl. handle) and cabinet height.

i

This is how it's done: Power factor LF = cabinet height [mm] x door weight including handle [kg]

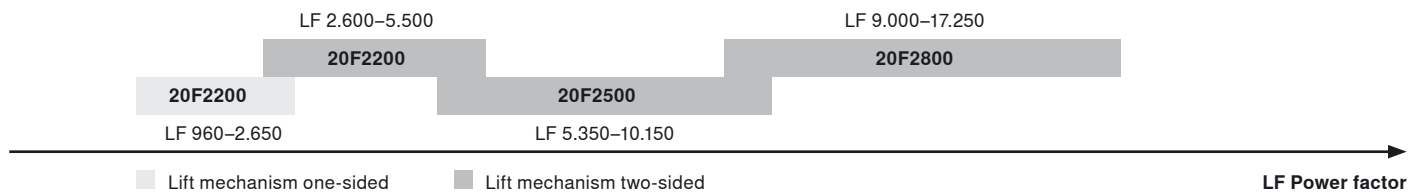

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1	Lift mechanism set	
	Power factor LF	
	2.600–5.500	20F2200
	5.350–10.150	20F2500
	9.000–17.250	20F2800
	Composed of:	
1a	2 x symmetrical lift mechanisms	
1b	2 x cover plates left/right	
1c	2 x round cover caps	
	10 x chipboard screws, Ø 4 x 35 mm	

2	Telescopic arm set	
	Nickel plated steel	
	Cabinet height 480–570 mm	20F3200
	Cabinet height 560–710 mm	20F3500
	Cabinet height 700–900 mm	20F3800
	Cabinet height 760–1.040 mm	20F3900
	Composed of:	
	2 x symmetrical telescopic arms	

3	CLIP adapter plate for telescopic arms	
	Spacing 0 mm left/right	175H5B00

4	CLIP top 120° alu frame hinge		
	Boss:	Screw-on	72T550A.TL
	Zinc boss	Unsprung	

5	Mounting plate for CLIP top 120° hinge		
	Standard mounting plates, distance depends on the gap top		
	Recommendation		
	Screw-on	Spacing 0 mm	175H5400


6	CLIP top alu frame centre hinge		
	Boss:	Screw-on	78Z550AT
	Zinc boss	Unsprung	

7	CLIP adapter plate for centre hinge	
	Symmetrical	175H5A00

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2




Peg positions for lift mechanism

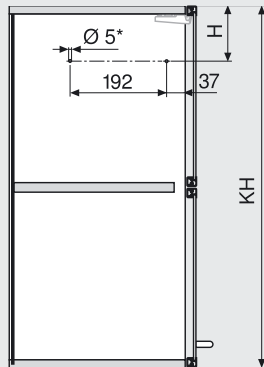

* Drilling depth 5 mm


Cabinet height KH	H
480–549 mm	KH x 0.3 - 28 mm
550–1.040 mm	KH x 0.3 - 57 mm

Fixing positions for lift mechanism

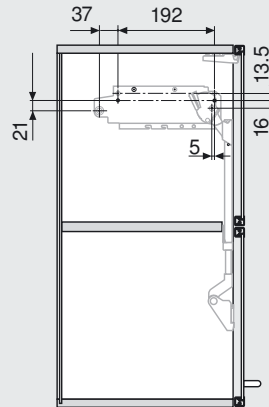


4 x Ø 4 x 35 mm

Space requirement

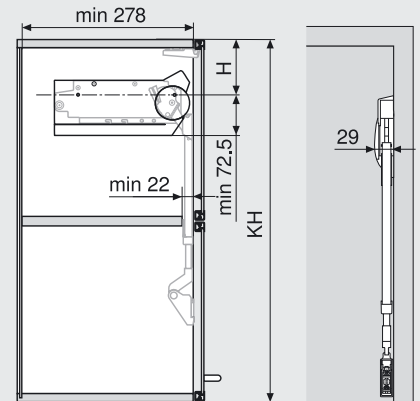

KH Cabinet height


Front assembly

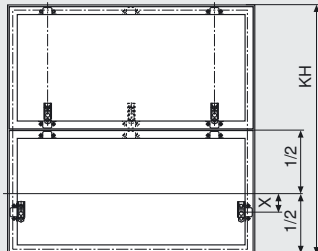


3 hinges starting at cabinet width 1.200 mm
and/or 12 kg door weight
4 hinges starting at cabinet width 1.800 mm
and/or 20 kg door weight

Cabinet height KH	X
480–549 mm	54 mm
550–1.040 mm	31 mm

CLIP top 120° alu frame hinge unsprung

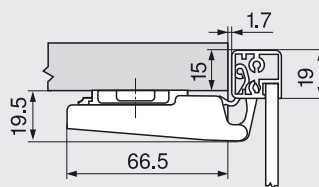


CLIP top alu frame centre hinge

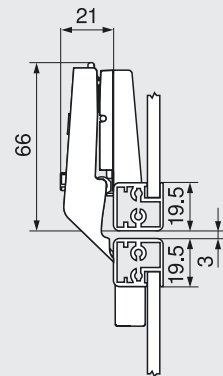

Minimum gap F = 1.5 mm


An adjustment has to be made for frame thicknesses over 20.5 mm

Front assembly

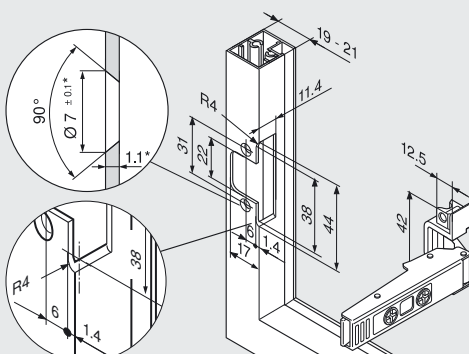


* When changing material thickness,
adjust the assembly dimensions accordingly

Space requirement

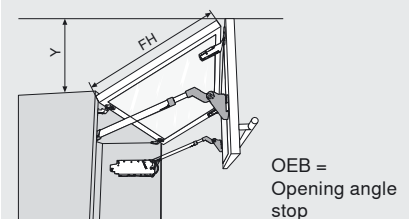

Without OEB		$Y = FH \times 0.44 + 38$
OEB 104°	20F7051	$Y = FH \times 0.24 + 34$
OEB 83°	20F7011	$Y = 0$

Ordering information Asymmetrical wooden fronts

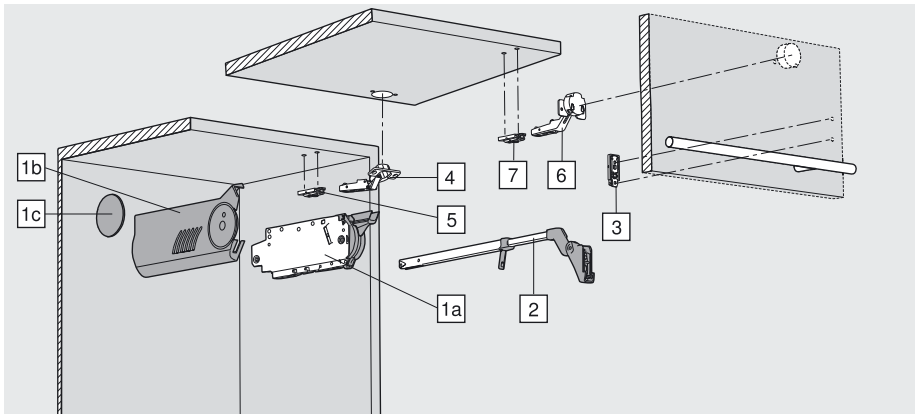

3 types of lift mechanisms are enough to cover a wide range of applications.

By establishing the power factor you can calculate the type and quantity of lift mechanisms.


The power factor required depends on the weight of the lower and upper front (incl. handle) and cabinet height.

The power factor and the door weight can be increased by 50% when a third lift mechanism is used.

The larger front must be at the top.

i

This is how it's done: Power factor = cabinet height (KH) [mm] x door weight including handle [kg]
Theoretical cabinet height (TKH) = upper front height (FHo) x 2 (including gaps)

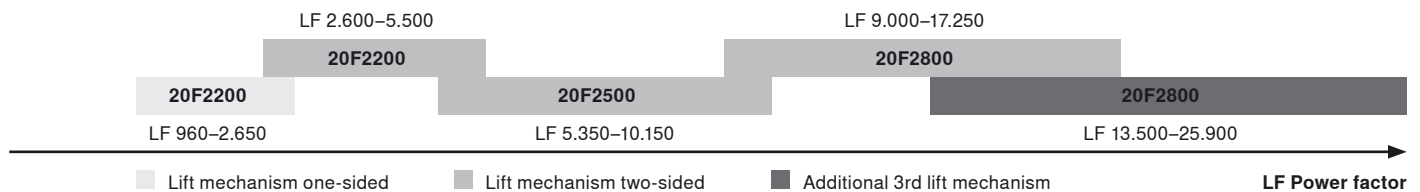

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1	Lift mechanism set	
	Power factor LF	
	2.600–5.500	20F2200
	5.350–10.150	20F2500
	9.000–17.250	20F2800
	Composed of:	
1a	2 x symmetrical lift mechanisms	
1b	2 x cover plates left/right	
1c	2 x round cover caps	
	10 x chipboard screws, Ø 4 x 35 mm	

2	Telescopic arm set	
	Nickel plated steel	
	Theoretical cabinet height 480–570 mm	20F3200
	Theoretical cabinet height 560–710 mm	20F3500
	Theoretical cabinet height 700–900 mm	20F3800
	Theoretical cabinet height 760–1.040 mm	20F3900
	Composed of:	
	2 x symmetrical telescopic arms	

3	Mounting plate for telescopic arm	
	All horizontal mounting plates with 0 mm distance	
	Recommendation	
	Screw-on* Spacing 0 mm	175H5400
	Knock-in Spacing 0 mm	177H5100
	* Use self tapping screws for wide alu frames 608.085	

4	CLIP top 120° hinge		
	Boss: Steel boss	Screw-on* Unsprung	70T5550.TL
	Boss: Steel boss	INSERTA Unsprung	70T5590BTL

* Use self tapping screws for wide alu frames 608.085

5	Mounting plate for CLIP top 120° hinge		
	Standard mounting plates, distance depends on the gap top		
	Recommendation		
	Screw-on	Spacing 0 mm	175H5400

6	CLIP top centre hinge		
	Boss: Zinc boss	Screw-on* Unsprung	78Z5500T
	Boss: Zinc boss	EXPANDO Unsprung	78Z553ET

* Use self tapping screws for wide alu frames 608.085


7	Mounting plate for CLIP top centre hinge		
	Standard mounting plates with 0 mm distance		
	Recommendation		
	Screw-on*	Spacing 0 mm	175H5400
	Only use a cruciform adapter plate for wide alu frames under a 55 mm frame width		

* Use self tapping screws for wide alu frames 608.085

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2




Peg positions for lift mechanism

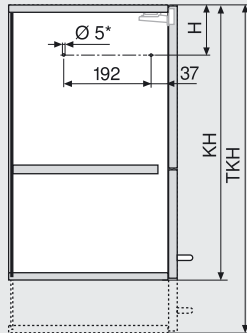

* Drilling depth 5 mm


TKH	H
480–549 mm	TKH x 0.3 - 28 mm
550–1.040 mm	TKH x 0.3 - 57 mm

Fixing positions for lift mechanism

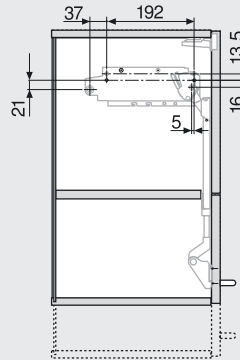

4 x Ø 4 x 35 mm

Space requirement

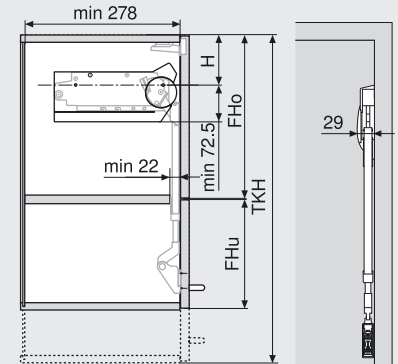


TKH Theoretical cabinet height

KH Cabinet height

FHo Upper front height

FHu Lower front height

Front assembly

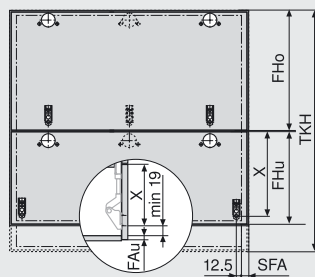


FHo Upper front height

TKH Theoretical cabinet height

SFA Side front overlay

TKH	X Screw-on/ EXPANDO	X Knock-in
480–549 mm	FHo/2 + 68 mm	FHo/2 + 70 mm
550–1.040 mm	FHo/2 + 45 mm	FHo/2 + 47 mm

CLIP top 120° hinge unsprung

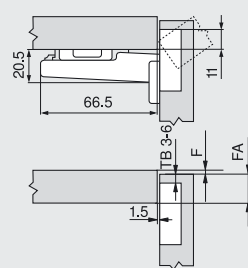


F Gap

Drilling distance TB

	Front overlay FA															
	5	6	7	8	9	10	11	12	13	14	15	16	17			
0											3	4	5	6		
3								3	4	5	6					
6				3	4	5	6									
9	3	4	5	6												

▲ Mounting plate

CLIP top centre hinge

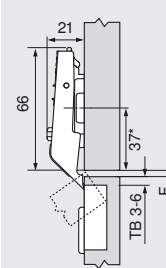

* 37 mm for cruciform mounting plates (37/32)


Minimum gap F = 1.5 mm

Drilling distance TB

	Centre gap F															
												3	4	5	6	
0												6	5	4	3	
3																
6																
9																

▲ Mounting plate

Min. lower front height




X + 19 + FAu

FAu Lower front overlay

Number of hinges

3 hinges starting at cabinet width 1.200 mm and/or 12 kg door weight
4 hinges starting at cabinet width 1.800 mm and/or 20 kg door weight


Space requirement

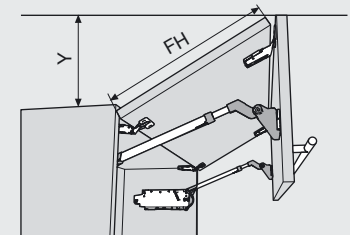


OEB = Opening angle stop

Without OEB		Y = FH x 0.44 + 38
OEB 104°	20F7051	Y = FH x 0.24 + 34
OEB 83°	20F7011	Y = 0

Screw-on

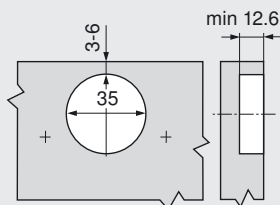

INSERTA/knock-in/EXPANDO assembly

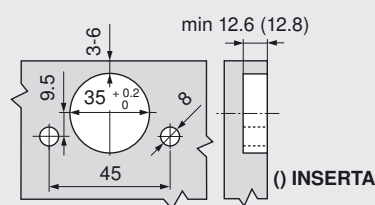


() INSERTA


This exploded view diagram illustrates the assembly of the window unit. The components are labeled as follows:


- 1a**: Main window frame assembly.
- 1b**: Top edge of the window frame.
- 1c**: Side edge of the window frame.
- 2**: Window handle.
- 3**: Window latch.
- 4**: Window hinge.
- 5**: Window hinge pin.
- 6**: Window hinge pin.
- 7**: Window hinge pin.


i


Lift Mechanism	LF Range
Lift mechanism one-sided (20F2200)	LF 960–2.650
Lift mechanism two-sided (20F2200)	LF 2.600–5.500
Lift mechanism two-sided (20F2500)	LF 5.350–10.150
Lift mechanism two-sided (20F2800)	LF 9.000–17.250

1	Lift mechanism set	
	Power factor LF	
	2.600–5.500	20F2200
	5.350–10.150	20F2500
	9.000–17.250	20F2800
	Composed of:	
1a	2 x symmetrical lift mechanisms	
1b	2 x cover plates left/right	
1c	2 x round cover caps	
	10 x chipboard screws, Ø 4 x 35 mm	


5	Mounting plate for CLIP top 120° hinge		
	Standard mounting plates, distance depends on the gap top		
	Recommendation		
	Screw-on	Spacing 0 mm	175H5400

6	CLIP top alu frame centre hinge		
	Boss: Zinc boss	Screw-on Unsprung	78Z550AT

7	CLIP adapter plate for centre hinge	
	Symmetrical	175H5A00

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2

AVENTOS HS


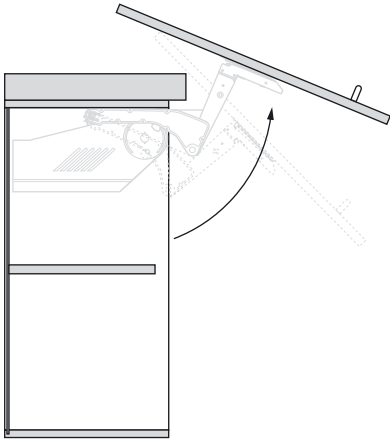


Design freedom for cornice or crown mouldings.

The AVENTOS HS up & over lift system can easily be combined with cabinets fitted with cornice or crown mouldings because the frontal swings up over the cabinet with enough space. AVENTOS HS opens up a variety of design options.



Other persuasive advantages

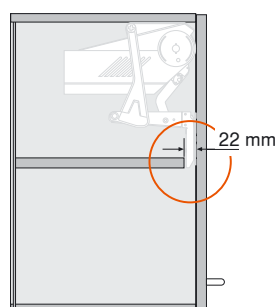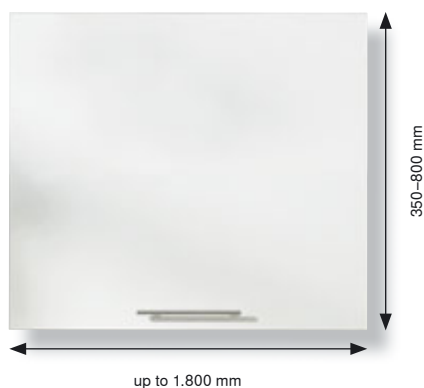

Small programme, huge variety of applications

AVENTOS HS completely covers all common frontal widths and heights with one simple programme: 9 different lift mechanisms and only 1 lever arm cover every size and front weight.

AVENTOS HS is suitable for cabinet widths up to 1.800 mm and for cabinet heights from 350 to 800 mm. The narrow programme range simplifies ordering, commissioning and warehousing. Because of its symmetrical design, the lift mechanism can be used on both the right and left.

Similar shelves possible

With AVENTOS HS, storage space is optimised in wall cabinets. Even smaller wall cabinets can be easily fitted with a shelf. A shelf with a back cut of only 22 mm in the centre can be used starting at a cabinet height of 500 mm. Starting with a cabinet height of 740 mm, two centre shelves are possible.

No protruding parts

There are no protruding parts thanks to the removable lever arm. This guarantees a high degree of safety during internal transport, furniture manufacturing and delivery to the customer.

AVENTOS HS

Assembly in just a few steps

AVENTOS HS assembly is almost entirely tool-free. For final assembly onsite, the wall cabinet front can be removed and then later reattached without the use of tools thanks to proven CLIP technology. This makes cabinet assembly easier, faster and safer.



- 1.** The lift mechanism is attached.
Installing the lever arm requires no tools.



- 2.** The cross stabiliser is attached to the lift mechanism for optimal side stability.



- 3.** The symmetrical front fixing bracket is attached to the front.



Warning

There is a danger of injury if the lever arm springs upward. Remove the lever arm rather than pushing it down.

Special warning and safety information must be sent out when used in North America.



- 4.** The lever arm and the front are connected via the CLIP mechanism.

Quick adjustment, precise adjustment

The front can be adjusted quickly in all 3 dimensions. Width, depth and height adjustment can be carried out onsite for perfect gap alignment.

Perfect motion requires a precise adjustment:



1. Lift mechanisms are set to the respective door weight using a power screwdriver (Pozidriv®, size 2, length 39 mm).

If the front falls when let go, it must be turned clockwise.


If the front rises when let go, it must be turned anti-clockwise.



2. The front can be manually adjusted in all 3 dimensions.

Order specification



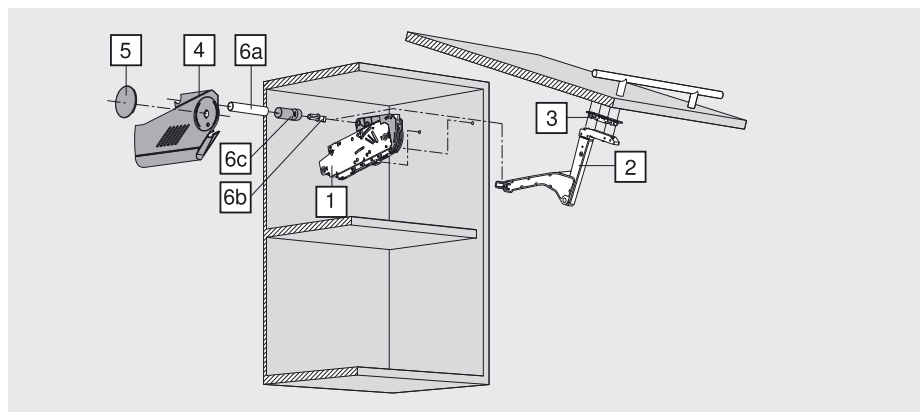

1	Lift mechanism set			
	Cabinet height 350–525	20S1A00	20S1B00	20S1C00
	Cabinet height 526–675	20S1D00	20S1E00	20S1F00
	Cabinet height 676–800	20S1G00	20S1H00	20S1I00
	Composed of:			
1	2 x symmetrical lift mechanisms			
2	2 x lever arm left/right			
4	2 x cover plates left/right			
5	2 x round cover caps			
6b	2 x stabiliser adapters			
6c	2 x cross stabiliser cover caps			
	10 x chipboard screws, Ø 4 x 35 mm			

3	Front fixing bracket set	
	Nickel plated	
	Wooden fronts and wide alu frames*	20S4200
	Narrow alu frames	20S4200A
	Composed of:	
	2 x symmetrical front fixing brackets	

* Use self tapping screws for wide alu frames 608.085

6a	Cross stabiliser rod round	
	Alu, Ø 16 mm	
	For cutting to size, 1.061 mm	20Q1061U

	Connecting piece for cross stabiliser set	
	Alu, Ø 16 mm, cabinet width 1.219 mm and higher	20Q091Z
	Composed of:	
	1 x connection piece	
	1 x fixing	
	2 x attachments	
	2 x cover caps	

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2

Order specification

In order to select the correct lift mechanism, it is necessary to establish both; the cabinet height and the weight of the front (including the handle)

Example:

Cabinet height KH = 600 mm

Weight of front incl. handle = 10 kg

Lift mechanism selection =

20S1E00

Cabinet height KH = 602 mm rounded to KH = 600 mm

Cabinet height KH = 603 mm rounded to KH = 605 mm

Weight of front incl. handle (kg)

KH (mm)	20S1G00	20S1H00	20S1I00
800	4.00–7.00	6.00–12.25	10.50–20.00
795	4.00–7.00	6.00–12.25	10.50–20.00
790	4.00–7.00	6.00–12.25	10.75–20.00
785	4.00–7.00	6.25–12.50	10.75–20.00
780	4.00–7.00	6.25–12.50	10.75–20.25
775	3.75–7.00	6.25–12.50	11.00–20.25
770	3.75–7.00	6.25–12.50	11.00–20.25
765	3.75–7.25	6.50–12.50	11.00–20.25
760	3.75–7.25	6.50–12.75	11.25–20.25
755	3.75–7.25	6.50–12.75	11.25–20.50
750	3.50–7.25	6.50–12.75	11.50–20.50
745	3.50–7.25	6.50–12.75	11.50–20.50
740	3.50–7.25	6.50–12.75	11.75–20.75
735	3.50–7.50	6.50–13.00	11.75–20.75
730	3.50–7.50	6.75–13.00	11.75–21.00
725	3.50–7.50	6.75–13.00	12.00–21.00
720	3.50–7.50	6.75–13.00	12.00–21.25
715	3.50–7.50	6.75–13.00	12.00–21.25
710	3.50–7.75	6.75–13.25	12.25–21.25
705	3.50–7.75	6.75–13.25	12.25–21.50
700	3.50–7.75	6.75–13.25	12.50–21.50
695	3.50–7.75	6.75–13.25	12.50–21.50
690	3.50–7.75	6.75–13.25	12.75–21.50
685	3.50–8.00	7.00–13.25	12.75–21.50
680	3.50–8.00	7.00–13.50	13.00–21.50
676	3.50–8.00	7.00–13.50	13.00–21.50


KH (mm)	20S1D00	20S1E00	20S1F00
675	3.00–5.25	5.00–11.00	09.75–19.00
670	3.00–5.25	5.00–11.00	09.75–19.00
665	3.00–5.25	5.00–11.00	09.75–19.00
660	3.00–5.50	5.25–11.25	10.00–19.00
655	3.00–5.50	5.25–11.25	10.00–19.00
650	3.00–5.50	5.25–11.25	10.00–19.00
645	3.00–5.50	5.25–11.25	10.00–18.75
640	3.00–5.50	5.25–11.25	10.00–18.75
635	3.00–5.50	5.25–11.50	10.25–18.75
630	3.00–5.75	5.50–11.50	10.25–18.75
625	3.00–5.75	5.50–11.50	10.25–18.75

620	3.00–5.75	5.50–11.50	10.25–18.75
615	3.00–5.75	5.50–11.50	10.25–18.75
610	3.00–6.00	5.50–11.75	10.50–18.50
605	3.00–6.00	5.50–11.75	10.50–18.50
600	3.00–6.00	5.50–11.75	10.50–18.50
595	3.00–6.00	5.50–11.75	10.50–18.50
590	3.00–6.00	5.50–12.00	10.75–18.25
585	3.00–6.25	5.75–12.00	10.75–18.25
580	3.00–6.25	5.75–12.00	11.00–18.00
575	3.00–6.25	5.75–12.00	11.00–18.00
570	3.00–6.25	5.75–12.25	11.25–17.75
565	3.00–6.25	5.75–12.25	11.25–17.75
560	3.00–6.50	6.00–12.25	11.25–17.50
555	3.00–6.50	6.00–12.50	11.50–17.50
550	3.00–6.50	6.00–12.50	11.50–17.25
545	3.00–6.50	6.00–12.50	11.50–17.25
540	3.00–6.50	6.00–12.75	11.75–17.00
535	3.00–6.75	6.25–12.75	11.75–16.75
530	3.00–6.75	6.25–12.75	11.75–16.75
526	3.00–6.75	6.25–13.00	12.00–16.50

KH (mm)	20S1A00	20S1B00	20S1C00
525	2.50–4.00	3.25–7.50	7.25–15.00
520	2.50–4.00	3.50–7.50	7.25–15.00
515	2.50–4.00	3.50–7.50	7.25–14.75
510	2.50–4.00	3.50–7.75	7.50–14.75
505	2.50–4.00	3.50–7.75	7.50–14.75
500	2.50–4.25	3.50–7.75	7.50–14.75
495	2.50–4.25	3.75–7.75	7.50–14.50
490	2.50–4.25	3.75–8.00	7.75–14.50
485	2.50–4.25	3.75–8.00	7.75–14.25
480	2.50–4.25	3.75–8.00	7.75–14.25
475	2.50–4.25	3.75–8.00	7.75–14.00
470	2.50–4.25	4.00–8.25	8.00–14.00
465	2.25–4.25	4.00–8.25	8.00–13.75
460	2.25–4.25	4.00–8.25	8.00–13.75
455	2.25–4.25	4.00–8.50	8.25–13.50
450	2.25–4.25	4.00–8.50	8.25–13.50
445	2.25–4.50	4.25–8.50	8.25–13.25
440	2.25–4.50	4.25–8.50	8.25–13.00
435	2.25–4.50	4.25–8.75	8.50–13.00
430	2.25–4.50	4.25–8.75	8.50–12.75
425	2.25–4.50	4.25–8.75	8.50–12.75
420	2.25–4.50	4.25–8.75	8.50–12.50
415	2.25–4.50	4.25–8.75	8.50–12.50
410	2.25–4.50	4.25–9.00	8.75–12.25
405	2.25–4.50	4.25–9.00	8.75–12.00
400	2.00–4.75	4.25–9.00	8.75–12.00
395	2.00–4.75	4.50–9.00	8.75–11.75
390	2.00–4.75	4.50–9.00	8.75–11.50
385	2.00–4.75	4.50–9.25	9.00–11.50
380	2.00–4.75	4.50–9.25	9.00–11.25
375	2.00–4.75	4.50–9.25	9.00–11.25
370	2.00–4.75	4.50–9.25	9.00–11.00
365	2.00–4.75	4.50–9.25	9.00–11.00
360	2.00–4.75	4.50–9.50	9.25–10.75
355	2.00–4.75	4.50–9.50	9.25–10.50
350	2.00–5.00	4.50–9.50	9.25–10.50




Peg positions for lift mechanism

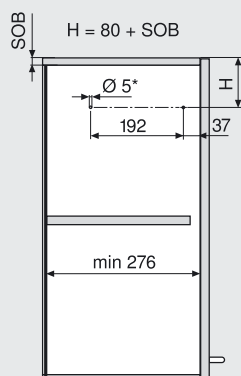

* Drilling depth 5 mm


SOB Top panel thickness

Fixing positions for lift mechanism

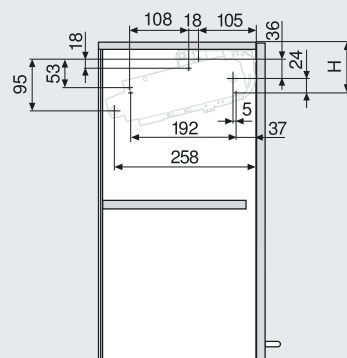


5 x Ø 4 x 35 mm

Space requirement

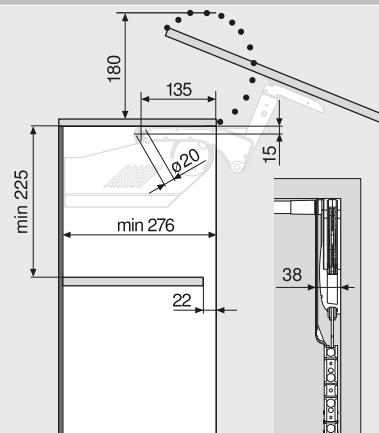

Front assembly

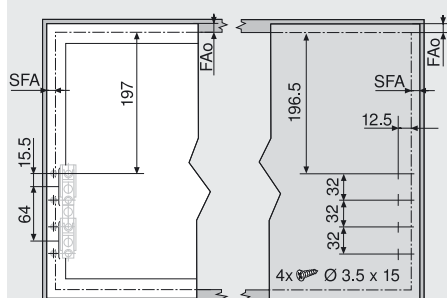

Narrow alu frames



Wooden fronts and wide alu frames*

FAo Upper front overlay

SFA Side front overlay

* wall application: requires 5 mm min. gap

Planning narrow alu frames

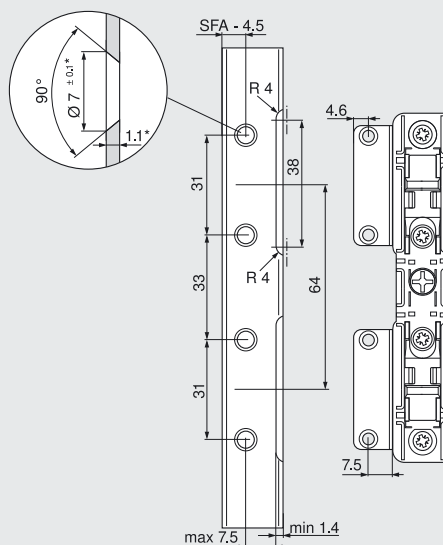


SFA Side front overlay

For frame width 19 mm: SFA of 11-18 mm possible


* When changing material thickness, adjust the assembly dimensions accordingly

Front setting

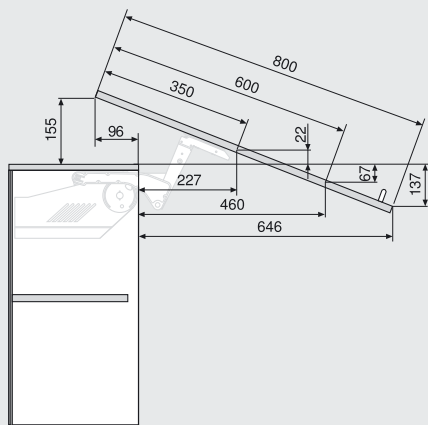


Dimensions depend on tilt adjustment

Cornice and crown moulding clearance

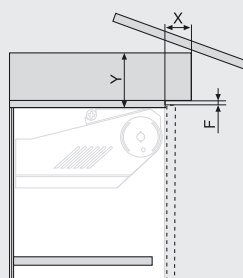


Gap F	X max	Y max
3 mm	35 mm	101 mm
2 mm	31 mm	101 mm
1.5 mm	28 mm	101 mm

Cross stabiliser



[1] KB (KS 16-19mm) - 158 mm and/or inner width - 120 mm

Connecting piece

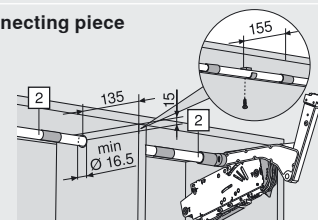


[2] half KB (KS 16-19mm) - 158 mm

KB Cabinet width

KS Cabinet thickness

AVENTOS HL

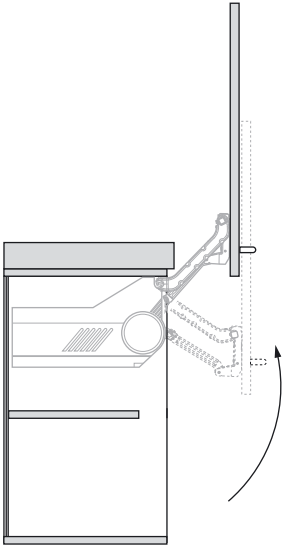


Full access.

Because the AVENTOS HL parallel lift can be raised completely, it provides excellent access to the cabinet interior. The different lever arms always ensure the best access to storage items in the cabinet interior – even for low-hanging cabinets.




Other compelling advantages

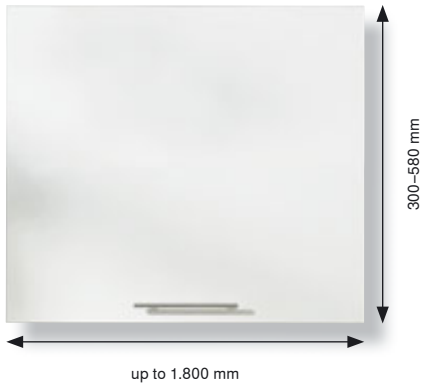

Small programme – wide range of applications

AVENTOS HL completely covers all common lift system widths and heights, and is also suitable for wide fronts. AVENTOS HL is suitable for cabinet widths up to 1.800 mm and for cabinet heights from 300 to 580 mm.

This small programme comprises just 5 different lift mechanisms and 4 lever arms. This selection enables the variable stop for every front size and weight. The straightforward programme range simplifies ordering, commissioning and warehousing.

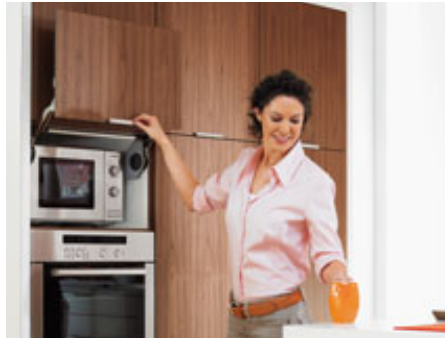

Numerous design options

Because the AVENTOS HL opens parallel to the cabinet, it can be used in wall cabinets or in the upper half of tall units. In the mid-point it can be adapted to conceal small appliances (i.e. microwaves). Thus enabling the concealment of small electrical appliances.



No protruding parts

There are no protruding parts thanks to the removable lever arm. This makes furniture manufacturing, transport and final assembly both easier and safer.

AVENTOS HL

Assembly in just a few steps

Nearly all steps for AVENTOS HL assembly are tool-free. We recommend removing and reattaching the fronts later on (again tool-free) for simple, safe and quick cabinet assembly onsite.




1. The lever arm is attached to the lift mechanism without the need for tools.



2. The cross stabiliser is attached to the lift mechanism for optimal side stability.



3. The symmetrical front fixing bracket is attached to the front.

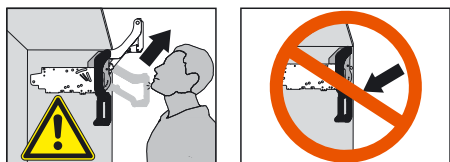

Warning

There is a danger of injury if the lever arm springs upward. Remove the lever arm rather than pushing it down.

Special warning and safety information must be sent out when used in North America.



4. The lever arm and the front are connected via the CLIP mechanism.

Quick adjustment, precise adjustment

The front can be adjusted in all 3 dimensions in only a few steps. Therefore the; front height, width and tilt positions can be precisely set. A calibrated scale is used for the fine adjustment of lift mechanism opening and closing forces.

Perfect motion requires a precise adjustment:



1. Lift mechanisms are set to the respective door weight using a power screwdriver (Pozidriv®, size 2, length 39 mm).


If the front falls when let go, it must be turned clockwise.

If the front rises when let go, it must be turned anti-clockwise.



2. Optimal front adjustment via the 3-dimensional setting.

Order specification

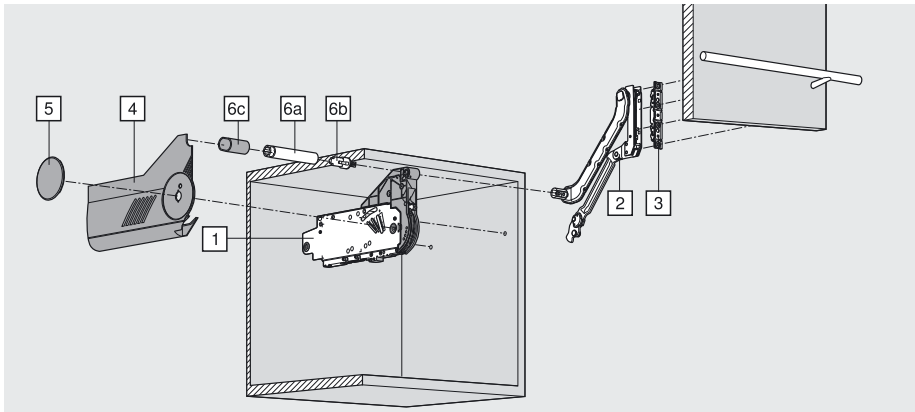

5 types of lift mechanisms are enough to cover a wide range of applications.

In order to select the correct lift mechanism, it is necessary to establish both; the cabinet height and the weight of the front (including the handle)

Cabinet height	Lever arm	Lift mechanism					
		20L2100	20L2300	20L2500	20L2700	20L2900	
300–349 mm	20L3200	1.25–4.25 kg	3.50–7.25 kg	6.50–12.00 kg	11.00–20.00 kg		
350–399 mm	20L3500	1.25–2.50 kg	1.75–5.00 kg	4.25–9.00 kg	8.00–14.75 kg	13.50–20.00 kg	
400–550 mm	20L3800		1.75–3.50 kg	2.75–6.75 kg	5.75–11.75 kg	10.50–20.00 kg	
450–580 mm	20L3900			2.00–5.25 kg	4.25–9.25 kg	8.25–16.50 kg	

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1	Lift mechanism set	
		20L2100
		20L2300
		20L2500
		20L2700
		20L2900
	Composed of:	
1	2 x symmetrical lift mechanisms	
4	2 x cover plates left/right	
5	2 x round cover caps	
	10 x chipboard screws, Ø 4 x 35 mm	

3	Front fixing bracket set	
	Nickel plated	
	Wooden fronts and wide alu frames*	20S4200
	Narrow alu frames	20S4200A
	Composed of:	
	2 x symmetrical front fixing brackets	

* Use self tapping screws for wide alu frames 608.085

6a	Oval cross stabiliser	
	Alu	
	For cutting to size, 1.061 mm	20Q1061UA


2	Lever arm set	
	Nickel plated steel	
	Cabinet height 300–349 mm left/right	20L3200
	Cabinet height 350–399 mm left/right	20L3500
	Cabinet height 400–550 mm left/right	20L3800
	Cabinet height 450–580 mm left/right	20L3900
	Composed of:	
2	2 x lever arms	
6b	2 x oval stabiliser adapters	
6c	2 x oval cross stabiliser cover caps	

	Connecting piece for cross stabiliser set	
	Alu, Ø 16 mm, cabinet width 1.219 mm and higher	20Q091ZA
	Composed of:	
	1 x connection piece	
	1 x fixing	
	2 x attachments	
	2 x cover caps	

	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2




Peg positions for lift mechanism

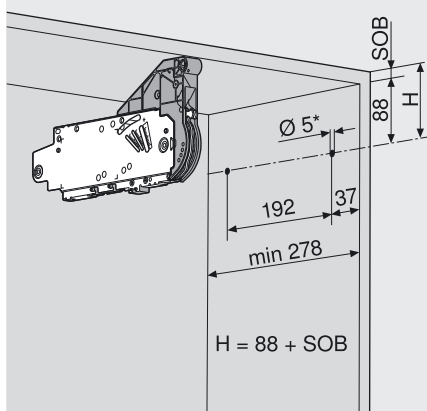

SOB Top panel thickness

* Drilling depth 5 mm

Fixing positions for lift mechanism

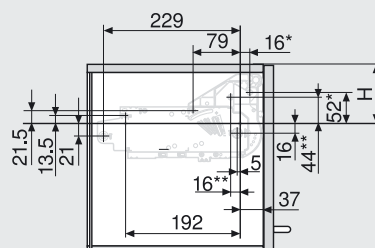


* Left

** Right

5 x Ø 4 x 35 mm


Space requirement

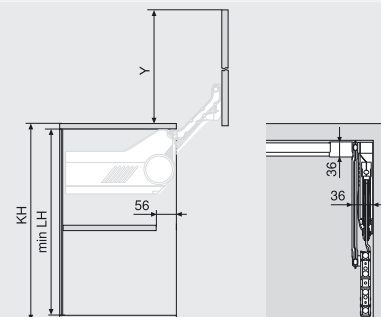

Lever arm	min LH (mm)*	Y (mm)*
20L3200	262	264
20L3500	312	352
20L3800	362	440
20L3900	412	529

* dimensions apply to lower gap = 0 mm

Front assembly

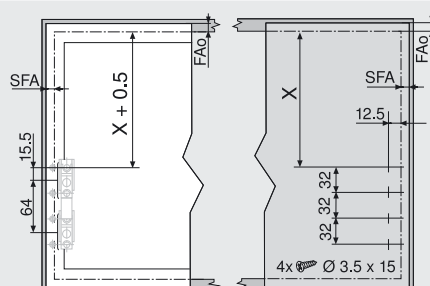


Narrow alu frames

Wooden fronts and wide alu frames*

Lever arm	X (mm)	FAo Upper front overlay
20L3200	153	SFA Side front overlay
20L3500	203	
20L3800	253	* wall application: requires 5 mm min. gap
20L3900	303	

Planning narrow alu frames

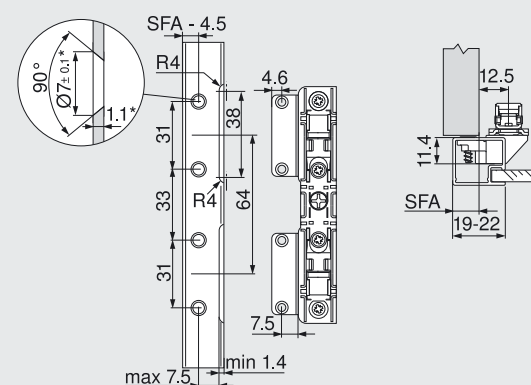


SFA Side front overlay

For frame width 19 mm: SFA of 11-18 mm possible

* When changing material thickness, adjust the assembly dimensions accordingly


Front setting

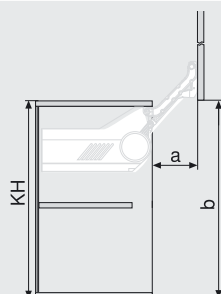

Lever arm	a (mm)*	b (mm)*
20L3200	114	257
20L3500	146	345
20L3800	178	433
20L3900	210	522

* dimensions apply to lower gap = 0 mm


Cornice / crown moulding clearance



SOB (mm)	X (mm)
16	28
18	30
19	31


SOB Top panel thickness

Cross stabiliser



[1] KB (KS 16-19 mm) -158 mm and/or inner width -120 mm

Connecting piece

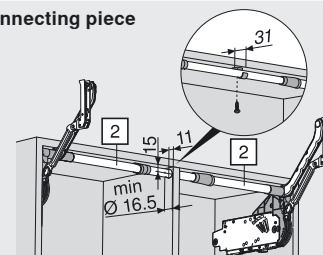


[2] half KB (KS 16-19 mm) -158 mm

KB Cabinet width

KS Cabinet thickness

AVENTOS HK

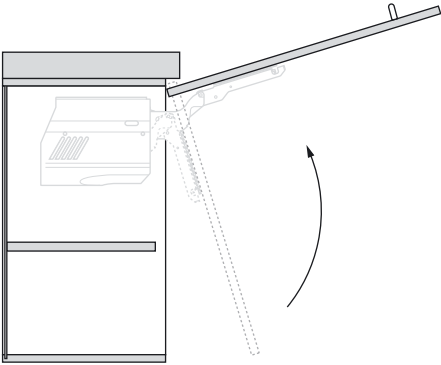


Design freedom for cornice or crown mouldings.

When developing AVENTOS HK, we also took into account cabinets with cornices and crown moulding. This provides more design freedom for kitchen planning.



Other persuasive advantages

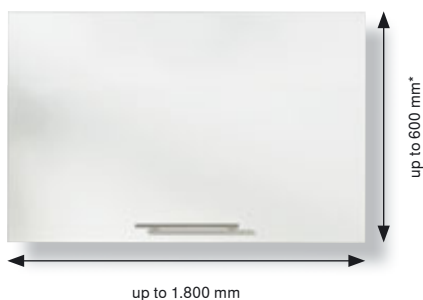

Small programme – wide range of applications

The AVENTOS HK programme only has 4 lift mechanism types. This completely covers all common lift system widths and heights. The small programme range simplifies ordering, commissioning and warehousing. Because of its symmetrical design, the lift mechanism can be used on both the left and right. Hinges are not necessary.

AVENTOS HK can be used for cabinet widths up to 1.800 mm.



No protruding parts

The AVENTOS HK fitting is delivered with a closed lever. This way no parts protrude over the cabinet front edge. The result is safer, more convenient transport – both within and out of the factory.

* For ergonomic reasons, we recommend a maximum cabinet height of 600 mm. However, higher frontals can also be used subject to the power factor limits.

Assembly in just a few steps

AVENTOS HK assembly can be carried out by hand. The front of the wall cabinet can be removed, without the need of tools, thanks to CLIP technology. This makes cabinet assembly easier, faster and safer.



1. Lift mechanism assembly: The symmetrical design enables it to be used on both the left and the right.



2. The symmetrical front fixing bracket is attached to the front.



3. Tool-free front assembly to the lift mechanism using CLIP technology.



Warning

There is a danger of injury if the lever springs upward. After opening, do not push down on the lever.


Special warning and safety information must be sent out when used in North America.

Quick adjustment, precise adjustment

The AVENTOS HK front can be adjusted in 3 dimensions. This enables you to create perfect gap alignment onsite – it's quick, precise and easy.

The power calibration feature of AVENTOS HF is used to make the fine adjustment to the opening and closing power. The force adjustment can be set exactly to the respective door weight. A calibrated scale facilitates the correct setting.

Perfect motion requires a precise adjustment:

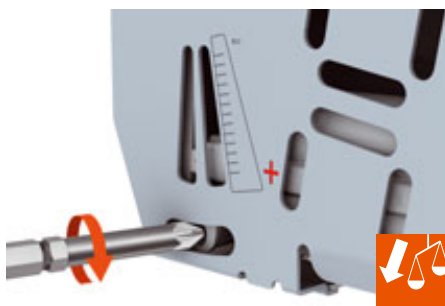

If the front falls when let go, it must be turned clockwise.




If the front rises when let go, it must be turned anti-clockwise.

1. The fine adjustment to the opening and closing forces on the lift mechanism are made using a power screwdriver (Pozidriv®, size 2, length 39 mm).



2. The front can be manually adjusted in all 3 dimensions.

Order specification

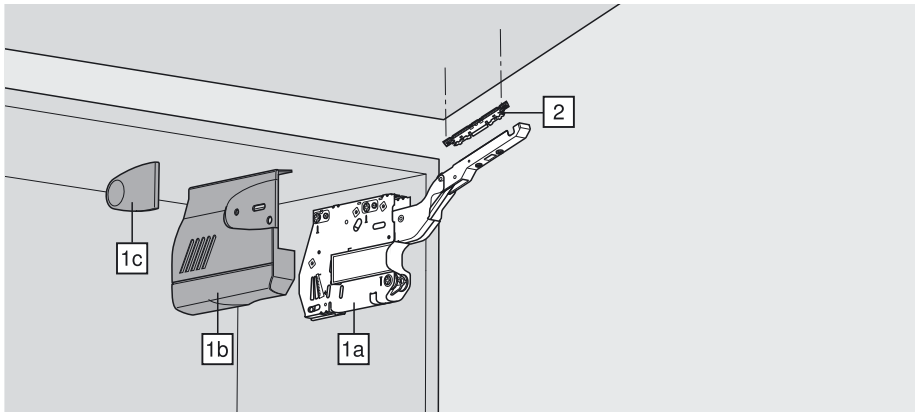


4 types of lift mechanisms are enough to cover a wide range of applications.

By establishing the power factor you can calculate the type and quantity of lift mechanisms. The power factor required depends on the weight of the front (incl. double the handle weight) and cabinet height. The power factor LF and the door weight can be increased by 50% when a third lift mechanism is used.

i

This is how it's done: Power factor = cabinet height (KH) [mm] x door weight including 2 handles [kg]

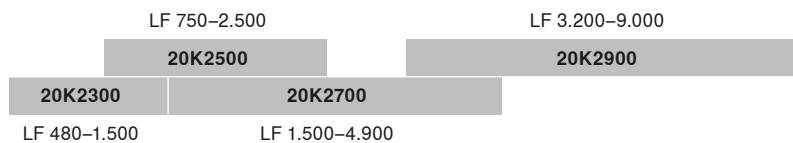

■ Lift mechanism two-sided

LF Power factor

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1a	Lift mechanism set		
	Power factor LF	Opening angle	
	480-1.500	107°	20K2300
	750-2.500	107°	20K2500
	1.500-4.900	107°	20K2700
	3.200-9.000	100°	20K2900
	Max. door weight 18 kg for two lift mechanisms		
	Composed of:		
1a	2 x symmetrical lift mechanisms		
1b	2 x cover plates left/right		
1c	2 x small symmetrical cover caps		
	10 x chipboard screws, Ø 4 x 35 mm		

2	Front fixing bracket set	
	Nickel plated	
	Wooden fronts and wide alu frames*	20S4200
	Narrow alu frames	20S4200A
	Composed of: 2 x symmetrical front fixing brackets	

* Use self tapping screws for wide alu frames 608.085

	Opening angle stop	
	Nylon	
	100°	20K7041
	75°	20K7011


	Bit PZ cross slot	
	size 2, length 39 mm	BIT-PZ KS2

Note

We recommend a 3rd lift mechanism attached to the centre panel for wide cabinets. This prevents sagging/bowing when open.




Peg positions for lift mechanism

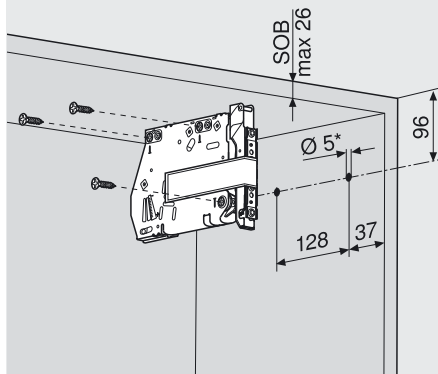

* Drilling depth 5 mm


SOB Top panel thickness

Fixing positions for lift mechanism

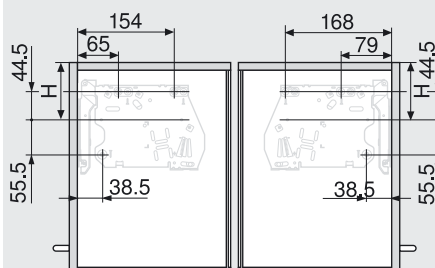


3 x Ø 4 x 35 mm

Space requirement

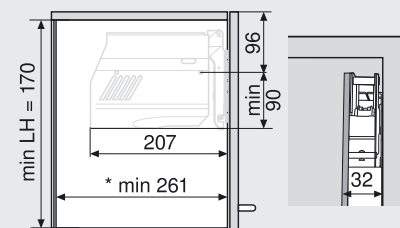

* min. 261 with visible wall hanging bracket

Front assembly

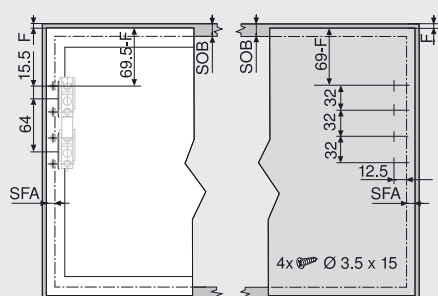

Narrow alu frames



Wooden fronts and wide alu frames

SOB Top panel thickness

F Gap

SFA Side front overlay

Planning narrow alu frames

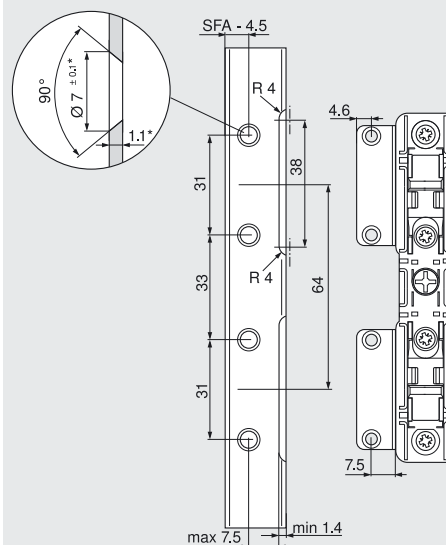


SFA Side front overlay

For frame width 19 mm, a SFA of 11–18 mm is possible

* When changing material thickness, adjust the assembly dimensions accordingly

Cornice and crown moulding clearance

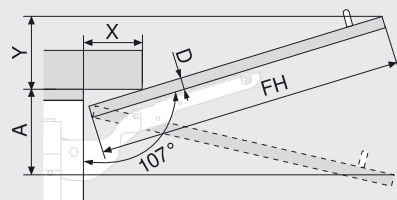

D (mm)	16	19	22	26	28
X (mm)	70	59	49	35	26

Without OEB $Y = FH \times 0.29 - 15 + D$


OEB 100° $Y = FH \times 0.17 - 15 + D$

OEB 75° $A = FH \times 0.26 + 15 - D$

FH Front height


OEB Opening angle stop

Min. Gap

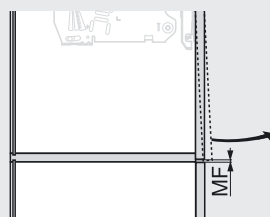

MF Minimum gap for opening (2 mm)

Cabinet assembly

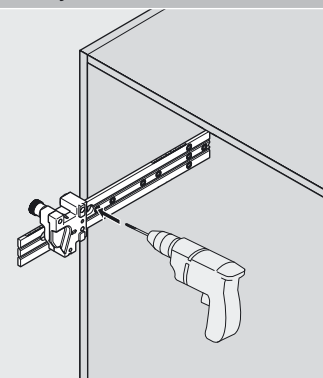


Drilling template

65.1051

Can be used for all lift systems

AVENTOS HK-S

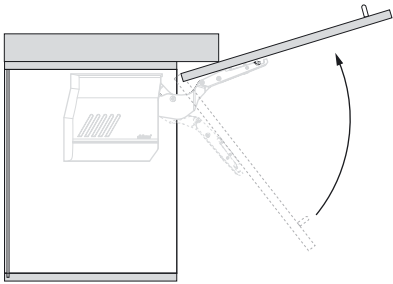


Used in small stay lifts

AVENTOS HK-S is well-suited for small cabinets, e.g. over the larder unit or refrigerator. Therefore there is a corresponding lift system for any installation situation. If the height of the room allows, you can even use design elements such as cornice or crown moulding.




Other compelling advantages

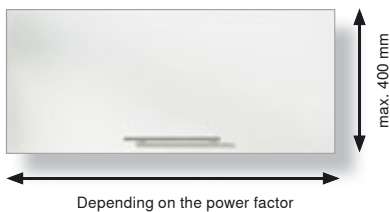

The fitting for small stay lifts

The performance of the lift mechanism was specially designed for smaller stay lifts. AVENTOS HK-S is suited for cabinet heights up to a max. of 400 mm.

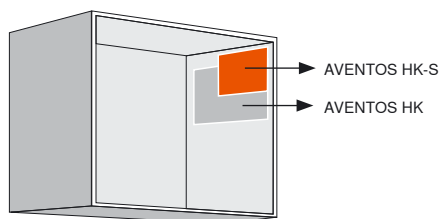

Harmonious proportions

Due to its minimal size, AVENTOS HK-S fits harmoniously into smaller cabinets. In a direct comparison, this version is even more compact than AVENTOS HK.



No protruding parts

The AVENTOS HK-S fitting is delivered with a closed lever. Thus no protruding parts, providing the best possible safety during internal transport.



AVENTOS HK-S

Assembly in just a few steps

AVENTOS HK-S is quick and easy to install. The front of the wall cabinet can be removed tool-free for cabinet assembly onsite. This is due to our proven CLIP technology.



1. Lift mechanism assembly: It can be installed on the left as well as the right – thanks to its symmetrical design.
2. The symmetrical front fixing bracket is attached to the front.
3. CLIP technology enables tool-free front assembly to the lift mechanism.



Warning

There is a danger of injury if the lever springs upward. After opening, do not push down on the lever.

Special warning and safety information must be added for use in North America.

Quick adjustment, exact fine adjustment

The AVENTOS HK-S lift system front can also be adjusted in 3 dimensions: To ensure correct visual effect. The fine adjustment to opening and closing forces is very easy and carried out via the lift mechanism. A calibration feature makes this easy.

Perfect motion requires a precise setting:



1. The fine adjustment of the lift mechanism requires an electric screwdriver (Pozidriv®, size 2, length 39 mm).



If the front falls when released, it must be turned to the right.




If the front opens fully when released, it must be turned to the left.



2. The front can be manually adjusted in all 3 dimensions.


Order specification

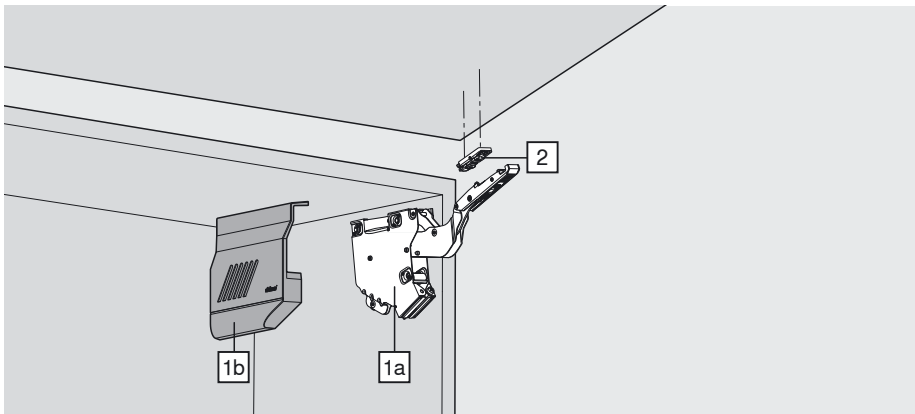

- Well-suited for low cabinet heights in the wall cabinet, the high cabinet and over the refrigerator
- Cabinet heights up to a max. of 400 mm
- Silent and effortless closing, thanks to BLUMOTION
- Light operating forces
- Perfect motion with a variable stop
- Simple, tool-free assembly
- 3-dimensional adjustment of the front
- Simple, infinitely variable lift mechanism
- No hinges required



This is how it's done: Power factor = cabinet height (KH) [mm] x door weight including double the handle weight [kg]

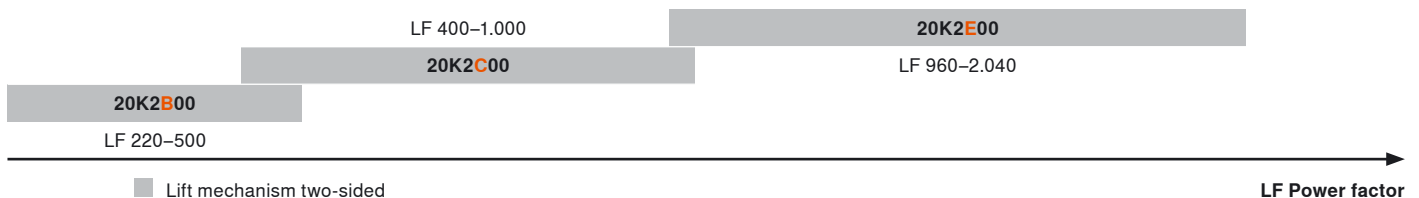

A trial application is recommended when you are in a borderline area of the individual lift mechanism.

1a	Lift mechanism set			
	Power factor LF	Spring	Opening angle	
	220-500	Weak	107°	20K2B00
	400-1.000	Medium	107°	20K2C00
	960-2.040	Strong	107°	20K2E00
	Composed of:			
1a	2 x symmetrical lift mechanisms			
1b	2 x cover caps left/right			
	10 x chipboard screws, Ø 4 x 35 mm			

2	Front fixing bracket set	
	Nickel plated	
	Wooden fronts and wide alu frames*	20K4A00
	Narrow alu frames	20K4A00A
	Composed of: 2 x symmetrical front fixing brackets	

* Use self tapping screws for wide alu frames 608.085

	Opening angle stop	
	Nylon	
	100°	20K7A41
	75°	20K7A11


	Bit PZ cross slot	
	Size 2, length 39 mm	BIT-PZ KS2

Note

We recommend a lift mechanism attached to the centre panel for wide cabinets. The reason for this is to prevent the middle of the front from sagging when open.




Peg positions for lift mechanism

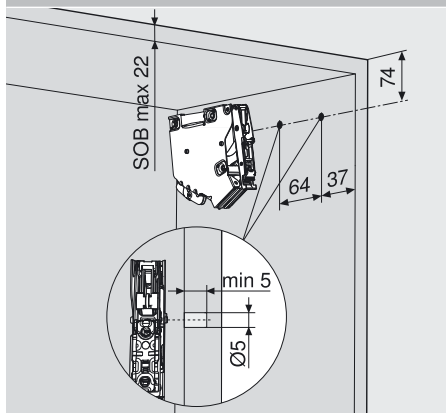


SOB Top panel thickness

Fixing positions for lift mechanism

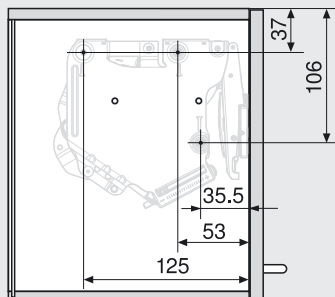


3 x Ø 4 x 35 mm

Space requirement

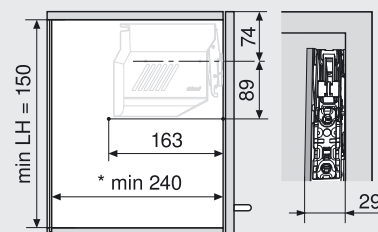


* min. 240 with visible wall hanging bracket

Front assembly

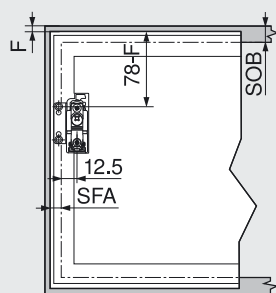


Narrow alu frames

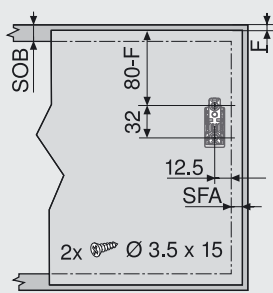

Wooden fronts and wide alu frames*


F	Gap
SFA	Side front overlay
SOB	Top panel thickness

Planning narrow alu frames

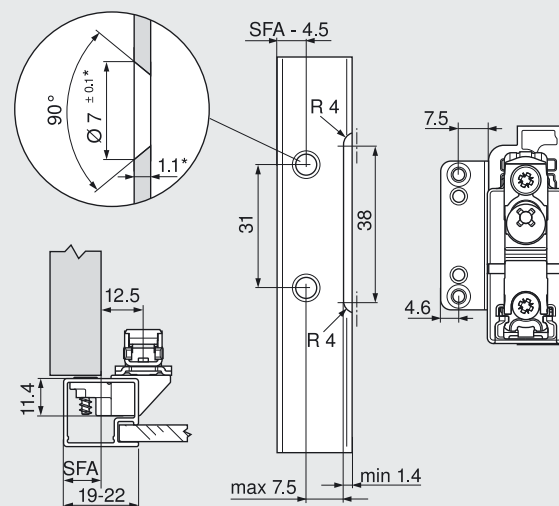

* When changing material thickness, adjust the assembly dimensions accordingly


Cornice and crown moulding clearance

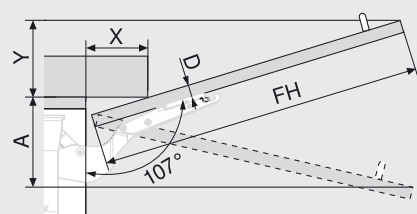

D (mm)	16	19	22	26
X (mm)	70	59	49	35


Without OEB	$Y = FH \times 0.29 - 15 + D$
OEB 100°	$Y = FH \times 0.17 - 15 + D$
OEB 75°	$A = FH \times 0.26 + 15 - D$
OEB	Opening angle stop

Min. gap

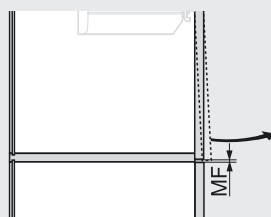

MF Min. gap top and bottom (2 mm)

Cabinet assembly

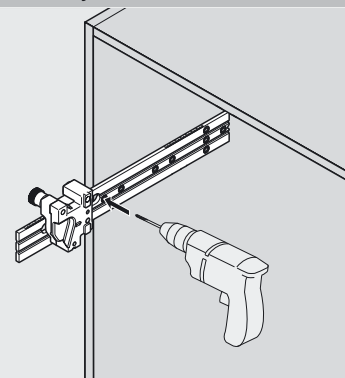

Drilling template
Can be used for all lift systems

65.1051

Perfecting motion



Our understanding of perfect motion

Blum turns the opening and closing of furniture into an experience that significantly increases the comfort of motion in the kitchen. Several thousand employees are continually working worldwide implementing our concept of perfect motion. Within this process, we place the needs of the kitchen user as the focus of our actions. We are only satisfied when the kitchen user is satisfied. All of our partners who participate in the furniture making process profit from this focus.

For over 50 years, quality has been the highest principle for the development and manufacture of our products. Our fittings systems shout “high quality” with their well-thought-out function, recognised design and high durability. They are designed to inspire and trigger fascination for perfect motion. We also set the bar very high for the services we offer. They must provide the best possible support to our partners.

So that we can target our efforts at all levels, we are in a constant dialogue with kitchen users and regularly exchange information with furniture manufacturers, joiners and distributors.





Julius Blum GmbH
Furniture Fittings Mfg.
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-mail: info@blum.com
www.blum.com

Subject to technical modifications and changes to the range without notice
All content is copyrighted by Blum
Printed in Austria · IDNR: 656.317.2 · EP-138/1 EN-AL/07.09-1