

stylelite-aca.com

StyleLite is the Australian made premium high gloss acrylic finished board for doors, drawer fronts and joinery.

StyleLite provides a superior appearance compared with laminates, 2 pack or vinyl - making it the preferred choice for interior designers and architects.

StyleLite is laminated using world class, PUR (polyurethane) hot melt bonding system which delivers unsurpassed adhesion and a premium ripple free finish that is highly resistant to heat and moisture.

#### **SUPERIOR FEATURES**

- Ultra high gloss ripple free surface
- UV and colour fade protected
- High scratch resistance
- Won't chip, crack or delaminate
- Very easy to clean and maintain
- Economical and easy to fabricate

## **APPLICATIONS**

- Kitchen Cabinets & Doors
- Office Furniture & Partitions
- Entry & Passageway Doors
- Wall Cladding in Retail Outlets
- Wardrobe Doors
- Entertainment & Occasional Furniture



#### **CLEANING**

Best results are achieved by using a soft cloth or chamois with a non abrasive soap or detergent in warm water.

#### **POLISHING**


Minor scratches and scuffs can be easily removed from StyleLite by hand with selected liquid polishes and soft polishing cloths.

### **ENVIRONMENT**

StyleLite is fully recyclable by mechanical means.

StyleLite sheet is manufactured and then laminated without the use of any VOC's or other harmful emissions.

StyleLite is hygienic and does not promote bacterial growth or transmission.

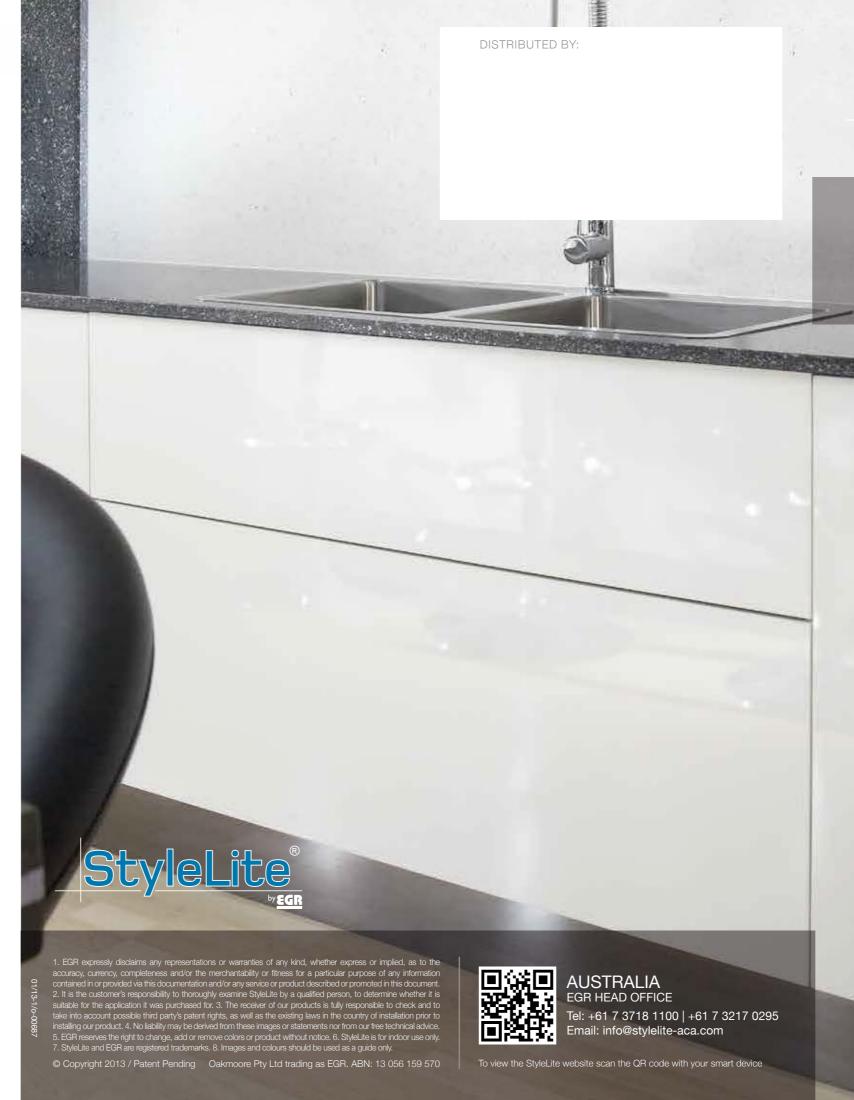

StyleLite

SUPERIOR HIGH GLOSS PANELS

EGR


stylelite-aca.com


# **COLOUR RANGE**


StyleLite is the 100% Australian owned and made high gloss board that is stylish in look and contemporary in colours.















LACE








ALABASTER



Stylelite is laminated to E0 MR MDF board. This is a low formaldehyde emitting MDF product that has a formaldehyde emission of less than 0.5mg/L, which is lower than the current Australian standard.











Due to the nature of the printing process, the colours and images depicted throughout this brochure may vary compared to the actual products' colour and results achievied. Images and colours are to be used as a guide only.

\* Denotes Metallic.

















## **EDGE TAPE**

A near seamless appearance can be achieved using StyleLite high gloss ABS colour matched edge tape.

Many other contrast and dual colour tapes can be used to achieve a sophisticated and contemporary style.

## **METALLIC COLOURS**

Metallic colours are directional. Take note of the arrows on the protective sheet. We recommend all metallic panels are positioned with the arrows in one direction to avoid apparent shade or colour variation.



STANDARD BOARD OPTIONS

Properties	Specification	Method
Gloss Level	> 90%	Viewed at 60°
Mass	13.5kg/m <sup>2</sup>	na.
Surface Hardness	2H - 3H	Pencil Hardness
Heat Distortion Temperature	85°C	ASTM D648
Service Temperature	70°C	Continuous
Fire Rating	GROUP 4	BCA
Bond Strength	100N (25N min)	AS/NZS 4266.28
Surface Resistance	1.25 MPa (0.9 MPa min)	AS/NZS 4266.7
Stain Resistance	No effect	AS/NZS 4266.25
Steam Resistance	No change after 30 min	AS/NZS 4266.23
Cracking Resistance	No effect	AS/NZS 4266.24
Dry Heat Resistance	No loss of gloss or colour change	AS/NZS 4266.26



StyleLite laminated board complies with AS/NZS 4386.1 Domestic Kitchen Assemblies for Appearance, Flatness, Substrate and Adhesive Bonding System.









