

StyleLite® Ultra High Gloss board can be edge finished in a wide variety of different ways. EGR has partnered with global edge finishing specialist Dollken / Surteco to create an extensive and diverse range.

All StyleLite compatible edge tapes are of premium quality and offer high resistance to heat, abrasion, impact and colour fade.

COLOUR MATCHED EDGE TAPES

When correctly applied the edge tapes will meet or exceed the AS/NZS 4386.1 for Domestic Kitchen Assemblies.

These have been developed to create a virtually seamless edge transition using the Surteco high gloss finished ABS tape. Size is 23mm x 1.0mm on 50 or 100 metre rolls.

DUAL COLOUR EDGE TAPES

Dual Colour Edge Tapes offer the realistic appearance of a thick glass like panel with far less weight and expense combined with the same ease of application of standard edge tapes. Dual Colour is manufactured using the Dollken premium Acrylic 3D technology in a silk finish that can be polished to a gloss if so desired. Dual colour is available to suit most StyleLite panel colours. Size is 23 x 1.3 mm on 50 metre rolls.

CONTRAST EDGE TAPES

Combine beautifully with the StyleLite colour range and include the distinctive 3D silk finished range of Acrylic tapes in a variety of colours but particularly, brushed aluminium, stainless steel and plywood looks. Standard size is 23 x 2.0 mm on 150 metre rolls. Contact Surteco for other width options.

All Dollken / Surteco edge tapes are supplied primed ready for application using EVA or PUR hot melt adhesives.

For more information visit

www.surteco.com.au or contact your StyleLite

Distributor or any Surteco office:

Brisbane 07 3245 1881 Sydney 02 9421 0300 Melbourne 03 9775 0533









For more information on this or any other fact sheet please visit -







StyleLite® is the ultra high gloss acrylic lamination product for all door, drawer or furniture construction, - and with its mirror-like appearance it will really turn heads.

StyleLite faced laminated boards are supplied ready to fabricate and feature a tough, protective masking film.

The masking film should only be removed once the fabrication and installation is complete.

When the film is removed a small amount of invisible adhesive residue is left behind and we recommend this residue is removed by lightly buffing with a suitable plastic polish.

This initial polishing process also provides additional protection to the surface from scratching or scuffing.

All quality brands of acrylic faced high gloss decorative sheet get harder and more scratch resistant over the first few days of exposure after the masking film is removed.

When compared to other leading brands StyleLite achieves the 2H level of scratch resistance 40% faster. StyleLite achieves the superior 3H hardness level in only 3 days after initial polish.

Following the fabrication an initial polishing procedure will ensure the maximum scratch resistance is achieved in the shortest possible time. For best results we recommend the following polishes: Vuplex, Novus #1 ultra gloss super polish, Plexus plastic polish.

StyleLite is harder, more scratch resistant, and ultra high gloss - Plus being able to cure faster than other products makes StyleLite the ideal lamination panel for all your decor needs.



REMOVE FILM




SPRAY PLASTIC POLISH



RUB



INCREASED HARDNESS

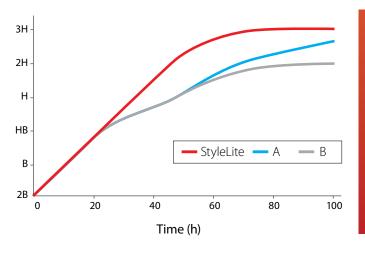

StyleLite is harder, more scratch resistant, & ultra high gloss which makes it the ideal lamination panel for your decor needs



For more information on this or any other fact sheet please visit -

stylelite-aca.com

